



FAST LED BAR

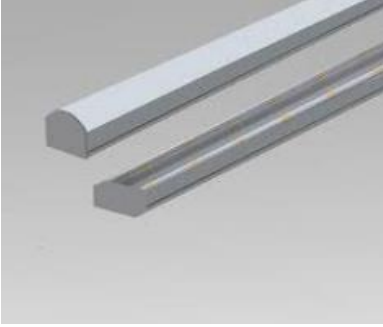

Body	Extruded Aluminum
Diffuser	Opal PMMA
Source of Light	Power LED
Lumen/Watt	120Lm/W
Input Voltage	220-240V AC 50/60 Hz
Mounting	Surface
Dimensions	W:18mm H:110mm
Light Color	3000K-4000K-6500K
CRI	>80
Dim	DALI / 1-10V
IP Rating	IP40

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
DLT100/18.15	Surface	15W	1800Lm	>80	3000-4000-6500K	18x11x1000mm
DLT150/18.22	Surface	22W	2640Lm	>80	3000-4000-6500K	18x11x1500mm
DLT200/18.30	Surface	30W	3600Lm	>80	3000-4000-6500K	18x11x2000mm
DLT250/18.37	Surface	37W	4440Lm	>80	3000-4000-6500K	18x11x2500mm
DLT300/18.45	Surface	45W	5400Lm	>80	3000-4000-6500K	18x11x3000mm
DLT350/18.52	Surface	52W	6240Lm	>80	3000-4000-6500K	18x11x3500mm
DLT400/18.60	Surface	60W	7200Lm	>80	3000-4000-6500K	18x11x4000mm
DLT450/18.68	Surface	68W	8160Lm	>80	3000-4000-6500K	18x11x4500mm
DLT500/18.75	Surface	75W	9000Lm	>80	3000-4000-6500K	18x11x4500mm