


AXEL SURFACE



Body	Extruded Aluminum
Diffuser	Opal PMMA-Micro Prismatic
Source of Light	Power LED
Lumen/Watt	120Lm/W
Input Voltage	220-240V AC 50/60 Hz
Mounting	Surface
Dimensions	W:33mm H:33mm
Light Color	3000K-4000K-6500K
CRI	>80
Options	DALI / 1-10V
IP Rating	IP40
Led lifetime	100.000+

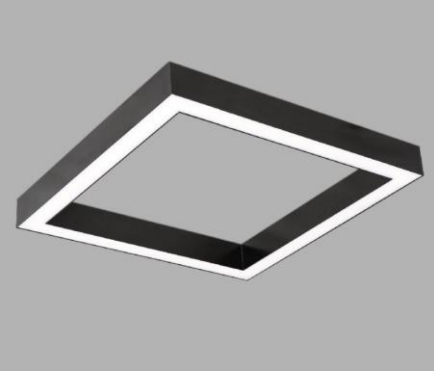

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
AXL55/33.44	Surface	44W	5280Lm	>80	3000-4000-6500K	33x33x550x550mm
AXL55/33.64	Surface	64W	7680Lm	>80	3000-4000-6500K	33x33x550x550mm
AXL100/33.88	Surface	88W	10560Lm	>80	3000-4000-6500K	33x33x1000x1000mm
AXL100/33.128	Surface	128W	15360Lm	>80	3000-4000-6500K	33x33x1000x1000mm
AXL120/33.105	Surface	105W	12600Lm	>80	3000-4000-6500K	33x33x1200x1200mm
AXL120/33.154	Surface	154W	18480Lm	>80	3000-4000-6500K	33x33x1200x1200mm
AXL150/33.132	Surface	132W	15840Lm	>80	3000-4000-6500K	33x33x1500x1500mm
AXL150/33.192	Surface	192W	23040Lm	>80	3000-4000-6500K	33x33x1500x1500mm
AXL200/33.176	Surface	176W	21120Lm	>80	3000-4000-6500K	33x33x2000x2000mm
AXL200/33.256	Surface	256W	30720Lm	>80	3000-4000-6500K	33x33x2000x2000mm
AXL250/33.220	Surface	220W	26400Lm	>80	3000-4000-6500K	33x33x2500x2500mm
AXL250/33.320	Surface	320W	38400Lm	>80	3000-4000-6500K	33x33x2500x2500mm
AXL300/33.264	Surface	264W	31680Lm	>80	3000-4000-6500K	33x33x3000x3000mm
AXL300/33.384	Surface	384W	46080Lm	>80	3000-4000-6500K	33x33x3000x3000mm