


ELITE RECESSED




Body	Stainless Steel
Diffuser	Opal PMMA-Micro Prismatic
Source of Light	Power LED
Lumen/Watt	120Lm/W
Input Voltage	220-240V AC 50/60 Hz
Mounting	Recessed
Dimensions	H:80mm
Light Color	3000K-4000K-6500K
CRI	>80
Dim	DALI / 1-10V
IP Rating	IP40

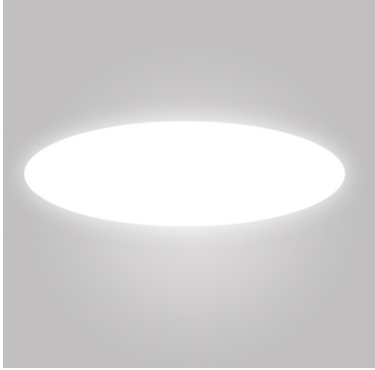

LED



IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ELT40/RE.80.40	Recessed	40W	4800Lm	>80	3000-4000-6500K	400x80mm
ELT50/RE.80.52	Recessed	52W	6240Lm	>80	3000-4000-6500K	500x80mm
ELT60/RE.80.60	Recessed	60W	7200Lm	>80	3000-4000-6500K	600x80mm
ELT90/RE.80.110	Recessed	110W	13200Lm	>80	3000-4000-6500K	900x80mm
ELT100/RE.80.120	Recessed	120W	14400Lm	>80	3000-4000-6500K	1000x80mm
ELT120/RE.80.200	Recessed	200W	24000Lm	>80	3000-4000-6500K	1200x80mm
ELT150/RE.80.360	Recessed	360W	43200Lm	>80	3000-4000-6500K	1500x80mm