

ATLAS LIGHTING

Indoor & Outdoor
Professional Lighting Products

2023

**We work with
planning and in
accordance with every
business aspect.**

ATLAS LIGHTING

The logo for ATLAS LIGHTING is a square with a thin, light-colored border. Inside the square, the words "ATLAS LIGHTING" are written in a clean, sans-serif, uppercase font, centered horizontally and vertically.

ATLAS Lighting offers architectural and technical lighting solutions and takes result oriented approaches in your lighting projects.

Except for the Six Sigma Theory;

It increases productivity, quality and customer satisfaction. Attempts solutions to “unsolvable” problems. The reason why light is so important to us today is our exploration of how shops, cafes, city centers and public spaces can harness the power of light to attract visitors.

Lighting determines our mood.

Lighting affects our emotions.

Lighting makes our modern life permanent.

The developments in technology have offered so many options in architectural and technical lighting as a result of designers’ making new experiments.

Selecting the right lighting armature will create a whole new atmosphere. Owing to lighting, we add aesthetic and functional values to the place we are in.

Lighting is the foundation of architectural structures. It improves the place’s perception and aesthetic features.

Our goal is to aid the purpose of architecture by drawing attention to the textures, colors and forms of an illuminated place and our mission is to meet people’s expectations regarding how the lighting will affect the appearance of their surroundings.

Product Groups	PAGE
LED Panel Lighting Luminaires	6-11
Downlight Lighting Luminaires	12-41
Spot Light Lighting Luminaires	42-53
Track Light Lighting Luminaires	54-56
Linear Lighting Luminaires	57-80
Decorative Lighting Luminaires	81-122
Industrial Lighting Luminaires	123-126
High-Bay Lighting Luminaires	127-129



Index

www.atlaslighting.com.tr

Product Groups	PAGE
Tri-Proof Lighting Luminaires	130-132
Floodlight Lighting Luminaires	133-149
Canopy Lighting Luminaires	150-154
Ex-proof Lighting Luminaires	155-157
Street & Road Lighting Luminaires	158-166
Park & Garden Lighting Luminaires	167-180
Emergency Lighting Luminaires	181-193
Project Images	194-223



LED Panel
Lighting Luminaires

FORM RECESSED




Body :	DKP Sheet
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	595x595x H:70mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+



LED



IP40

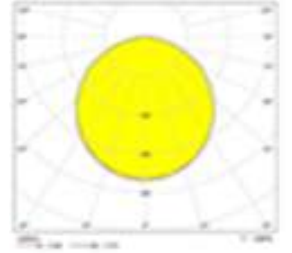


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
FRM3030/70.12	Recessed	12W	1440Lm	>80	3000-4000-6500K	295X295x70mm
FRM3060/70.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	295X595x70mm
FRM6060/70.36	Recessed	36W	4320Lm	>80	3000-4000-6500K	595X595x70mm
FRM30120/70.36	Recessed	36W	4320Lm	>80	3000-4000-6500K	295X1195x70mm
FRM60120/70.70	Recessed	70W	8400Lm	>80	3000-4000-6500K	595X1195x70mm
FRM120120/70.140	Recessed	140W	16800Lm	>80	3000-4000-6500K	1195X1195x70mm

FORM SURFACE HYGIENIC



Body :	Paslanmaz Çelik
Diffuser :	Opal PMMA-Temperli Cam
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sıva Üstü
Dimensions :	595x595x H:85mm
Light Color :	3000-4000-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP65
Led lifetime :	100.000+

CE  LED  IP65



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
FRM3030/SU.70.12	Surface	12W	1440Lm	>80	3000-4000-6500K	295X295x85mm
FRM3060/SU.70.22	Surface	22W	2640Lm	>80	3000-4000-6500K	295X595x85mm
FRM6060/SU.70.36	Surface	36W	4320Lm	>80	3000-4000-6500K	595X595x85mm
FRM30120/SU.70.36	Surface	36W	4320Lm	>80	3000-4000-6500K	295X1195x85mm
FRM60120/SU.70.70	Surface	70W	8400Lm	>80	3000-4000-6500K	595X1195x85mm
FRM120120/SU.70.140	Surface	140W	16800Lm	>80	3000-4000-6500K	1195X1195x85mm

FORM SURFACE




Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	H:70mm
Light Color :	3000-4000-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+



LED



IP65




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H)
FRM3030S/70.12	Surface	12W	1440Lm	>80	3000-4000-6500K	300x300x70mm
FRM3060S/70.22	Surface	22W	2640Lm	>80	3000-4000-6500K	300x600x70mm
FRM6060S/70.36	Surface	36W	4320Lm	>80	3000-4000-6500K	600x600x70mm
FRM30120S/70.36	Surface	36W	4320Lm	>80	3000-4000-6500K	300x1200x70mm
FRM60120S/70.70	Surface	70W	8400Lm	>80	3000-4000-6500K	600x1200x70mm
FRM120120S/70.140	Surface	140W	16800Lm	>80	3000-4000-6500K	1200x1200x70mm

FORM SUSPENDED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	H:70mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

CE RoHS LED IP40



Ürün Kodu	Ürün	Watt	Lumen	CRI	Işık Rengi	Ölçüler / mm
FRM3030SU/70.12	Sarkıt Led Panel	12W	1440Lm	>80	3000-4000-6500K	300x300x70mm
FRM3060SU/70.22	Sarkıt Led Panel	22W	2640Lm	>80	3000-4000-6500K	300x600x70mm
FRM6060SU/70.36	Sarkıt Led Panel	36W	4320Lm	>80	3000-4000-6500K	600x600x70mm
FRM30120SU/70.36	Sarkıt Led Panel	36W	4320Lm	>80	3000-4000-6500K	300x1200x70mm
FRM60120SU/70.70	Sarkıt Led Panel	70W	8400Lm	>80	3000-4000-6500K	600x1200x70mm
FRM120120SU/70.140	Sarkıt Led Panel	140W	16800Lm	>80	3000-4000-6500K	1200x1200x70mm

FORM HYGIENIC




Body :	DKP Sheet
Diffuser :	Opal PMMA-Tempered Glass
Source of Light:	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	595x595x H:85mm
Light Color :	3000-4000-6500K
CRI :	>80
Options:	DALI / 1-10V
IP Rating :	IP65
Led lifetime :	100.000+



LED



IP65




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
FRM3030/S.70.12	Recessed	12W	1440Lm	>80	3000-4000-6500K	295X295x85mm
FRM3060/S.70.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	295X595x85mm
FRM6060/S.70.36	Recessed	36W	4320Lm	>80	3000-4000-6500K	595X595x85mm
FRM30120/S.70.36	Recessed	36W	4320Lm	>80	3000-4000-6500K	295X1195x85mm
FRM60120/S.70.70	Recessed	70W	8400Lm	>80	3000-4000-6500K	595X1195x85mm
FRM120120/S.70.140	Recessed	140W	16800Lm	>80	3000-4000-6500K	1195X1195x85mm

Downlight
Lighting Luminaires

ALTO



Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lümen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000K-4000K-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
ALT.2022.25	25W	3250Lm	>95	>80	3000-4000-6500K	700gr	Ø:210mm	Ø:227 D: 85mm
ALT.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	530gr	Ø:175mm	Ø:192 D: 85mm
ALT.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	470gr	Ø:160mm	Ø:175 D: 85mm
ALT.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	300gr	Ø:105mm	Ø:117 D: 70mm
ALT.2022.6	6W	780Lm	>95	>80	3000-4000-6500K	280gr	Ø:85mm	Ø:97 D: 70mm

ARENA



Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

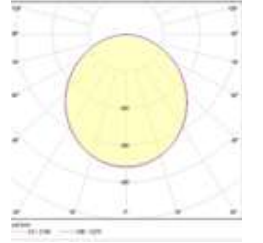

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
ARN.2022.25	25W	3250Lm	>95	>80	3000-4000-6500K	860gr	Ø:175mm	H:192 D: 55mm
ARN.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	580gr	Ø:130mm	H:147 D: 54mm
ARN.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	420gr	Ø:105mm	H:117 D: 48mm
ARN.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	370gr	Ø:85mm	H:97 D: 45mm

ASSIST




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

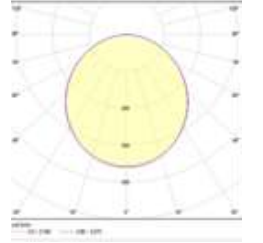


Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
AST.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	430gr	Ø:1050mm	W:120 D: 85mm
AST.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	400gr	Ø:80mm	W:90 D: 85mm

AURO




Body :	Die cast aluminum
Diffuser :	Opal PMMA
Işık Kaynağı :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

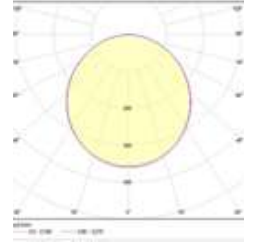

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
ARA.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	700gr	Ø:210mm	Ø:227 H:85 mm
ARA.2022.20	20W	2500Lm	>95	>80	3000-4000-6500K	530gr	Ø:175mm	Ø:192 H:85 mm
ARA.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	470gr	Ø:160mm	Ø:175 H:85 mm
ARA.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	360gr	Ø:130mm	Ø:147 H:80 mm
ARA.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	300gr	Ø:105mm	Ø:117 H:70 mm
ARA.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	280gr	Ø:85mm	Ø:97 H:70 mm

BLOOP

Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

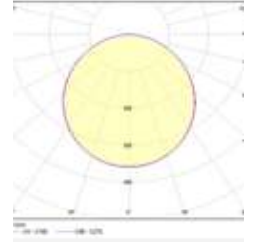

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
BLP.2022.25	25W	3250Lm	>95	>80	3000-4000-6500K	660gr	Ø:180mm	Ø:200 D: mm
BLP.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	360gr	Ø:130mm	Ø:150 D: mm
BLP.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	300gr	Ø:105mm	Ø:120 D: mm
BLP.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	280gr	Ø:90mm	Ø:108 D: mm
BLP.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	150gr	Ø:70mm	Ø:80 D: mm

CAPRI




Body :	Die cast aluminum
Diffuser :	PMMA Opal
Source of light :	Power LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

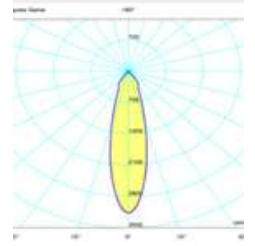

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
CPR.2022.40	40W	5000Lm	95+	80+	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
CPR.2022.32	32W	4000Lm	95+	80+	3000-4000-6500K	1100gr	Ø:2x160mm	H:175 W:350 D:120mm
CPR.2022.24	24W	3500Lm	95+	80+	3000-4000-6500K	910gr	Ø:2x130mm	H:147 W:294 D:120mm
CPR.2022.16	16W	2000Lm	95+	80+	3000-4000-6500K	690gr	Ø:2x105mm	H:117 W:234 D:120mm
CPR.2022.12	12W	1500Lm	95+	80+	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

COSMO




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light:	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IIP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

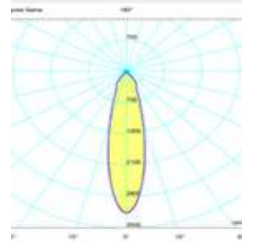

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
CSM.2022.50	50W	6500Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
CSM.2022.36	36W	4680Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x160mm	H:175 W:350 D:120mm
CSM.2022.24	24W	3120Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x130mm	H:147 W:294 D:120mm
CSM.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	595gr	Ø:2x105mm	H:117 W:234 D:120mm
CSM.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

DECO




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	2700-3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

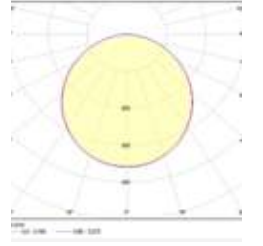

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
DCO.2022.25	25W	3125Lm	>95	>80	3000-4000-6500K	700gr	Ø:210mm	Ø:227 D: 85mm
DCO.2022.18	18W	2250Lm	>95	>80	3000-4000-6500K	530gr	Ø:175mm	Ø:192 D: 85mm
DCO.2022.18	18W	2250Lm	>95	>80	3000-4000-6500K	470gr	Ø:160mm	Ø:175 D: 85mm
DCO.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	360gr	Ø:130mm	Ø:147 D: 75mm
DCO.2022.9	9W	1125Lm	>95	>80	3000-4000-6500K	300gr	Ø:105mm	Ø:117 D: 70mm
DCO.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	280gr	Ø:85mm	Ø:97 D: 70mm

DIVA




Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

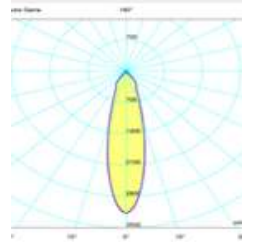

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
DVA.2022.40	40W	5000Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
DVA.2022.32	32W	4000Lm	>95	>80	3000-4000-6500K	1100gr	Ø:2x160mm	H:175 W:350 D:120mm
DVA.2022.24	24W	3500Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x130mm	H:147 W:294 D:120mm
DVA.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x105mm	H:117 W:234 D:120mm
DVA.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

DOME



Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



IP20




Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
DME.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	880gr	Ø:210mm	Ø:227 H:58 mm
DME.2022.20	20W	2500Lm	>95	>80	3000-4000-6500K	620gr	Ø:175mm	Ø:192 H:58 mm
DME.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	520gr	Ø:160mm	Ø:175 H:58 mm
DME.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	430gr	Ø:130mm	Ø:147 H:54 mm
DME.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	320gr	Ø:105mm	Ø:117 H:48 mm
DME.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	260gr	Ø:85mm	Ø:97 H:55 mm

FORUM



Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

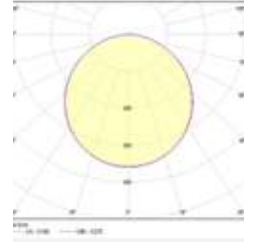

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
FRM.2022.25	25W	3250Lm	>95	>80	3000-4000-6500K	620gr	Ø:175mm	Ø:192 D:55 mm
FRM.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	430gr	Ø:130mm	Ø:147 D:54 mm
FRM.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	320gr	Ø:105mm	Ø:117 D:48 mm
FRM.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	260gr	Ø:85mm	Ø:97 D:55 mm

FORZA




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

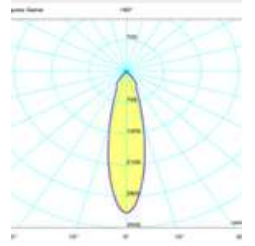


Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
FRZ.2022.50	50W	6500Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
FRZ.2022.36	36W	4680Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x160mm	H:175 W:350 D:120mm
FRZ.2022.24	24W	3120Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x130mm	H:147 W:294 D:120mm
FRZ.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	595gr	Ø:2x105mm	H:117 W:234 D:120mm
FRZ.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

KARMA



Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

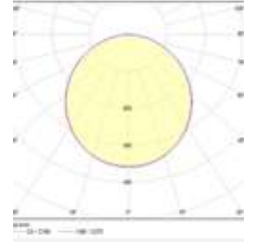

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
KRM.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	1200gr	Ø:210mm	W:227 H:227 D:85 mm
KRM.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	860gr	Ø:175mm	W:192 H:192 D:85 mm
KRM.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	720gr	Ø:160mm	W:175 H:175 D:85 mm
KRM.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	580gr	Ø:130mm	W:147 H:147 D:80 mm
KRM.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	420gr	Ø:105mm	W:117 H:117 D:70 mm
KRM.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	370gr	Ø:85mm	W:97 H:97 D:70 mm

LARA




Body :	Die cast aluminum
Diffuser:	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

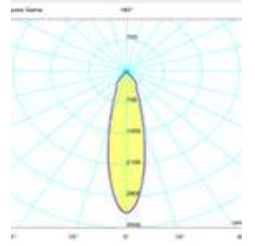


Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
LRA.2022.40	40W	5000Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
LRA.2022.32	32W	4000Lm	>95	>80	3000-4000-6500K	1100gr	Ø:2x160mm	H:175 W:350 D:120mm
LRA.2022.24	24W	3500Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x130mm	H:147 W:294 D:120mm
LRA.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x105mm	H:117 W:234 D:120mm
LRA.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

LUNA



Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

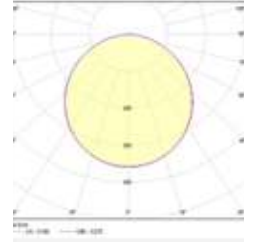

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
LNA.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	1000gr	Ø:210mm	W:227 H:227 D:85 mm
LNA.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	770gr	Ø:175mm	W:192 H:192 D:85 mm
LNA.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	670gr	Ø:160mm	W:175 H:175 D:85 mm
LNA.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	520gr	Ø:130mm	W:147 H:147 D:75 mm
LNA.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	400gr	Ø:105mm	W:117 H:117 D:70 mm
LNA.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	380gr	Ø:85mm	W:97 H:97 D:70 mm

MANTA




Body :	Die cast aluminum
Diffuser :	Aluminyum Reflektör - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Sıva Altı
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

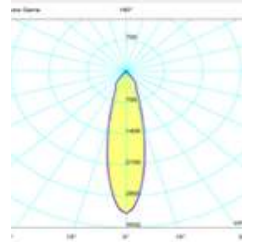


Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
MNT.2022.50	50W	6500Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
MNT.2022.36	36W	4680Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x160mm	H:175 W:350 D:120mm
MNT.2022.24	24W	3120Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x130mm	H:147 W:294 D:120mm
MNT.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	595gr	Ø:2x105mm	H:117 W:234 D:120mm
MNT.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

MATE



Body :	Aluminyum Enjeksiyon
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+

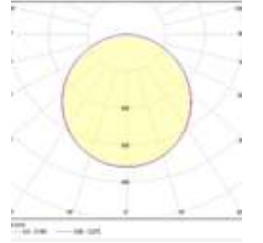

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
MTE.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	660gr	Ø:210mm	Ø:240 H:58 mm
MTE.2022.20	20W	2500Lm	>95	>80	3000-4000-6500K	470gr	Ø:180mm	Ø:200 H:58 mm
MTE.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	360gr	Ø:130mm	Ø:150 H:58 mm
MTE.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	300gr	Ø:105mm	Ø:120 H:55 mm
MTE.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	280gr	Ø:90mm	Ø:108 H:40 mm
MTE.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	150gr	Ø:70mm	Ø:80 H:40 mm

METRO




Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color:	2700-3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

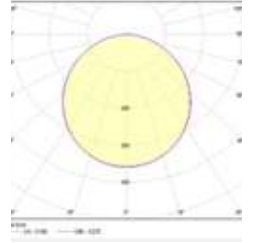


Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
MTR.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	700gr	Ø:210mm	Ø:227 H:85 mm
MTR.2022.20	20W	2500Lm	>95	>80	3000-4000-6500K	530gr	Ø:175mm	Ø:192 H:85 mm
MTR.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	470gr	Ø:160mm	Ø:175 H:85 mm
MTR.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	360gr	Ø:130mm	Ø:147 H:80 mm
MTR.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	300gr	Ø:105mm	Ø:117 H:70 mm
MTR.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	280gr	Ø:85mm	Ø:97 H:70 mm

ORA



Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB
Lumen/Watt :	120Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	2700K-3000K-4000K
Options :	DALI / 1-10V
IP rating :	IP20
Led lifetime :	100.000+



Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg
ORA.97108/9	Siva Altı	9W	1080Lm	>80	2700-3000-4000K	Ø:85 H:110mm
ORA.117108/12	Siva Altı	12W	1440Lm	>80	2700-3000-4000K	Ø:105 H:110mm
ORA.147108/18	Siva Altı	18W	2160Lm	>80	2700-3000-4000K	Ø:147 H:110mm
ORA.175108/25	Siva Altı	25W	3000Lm	>80	2700-3000-4000K	Ø:160 H:110mm

PLACE




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	2700-3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

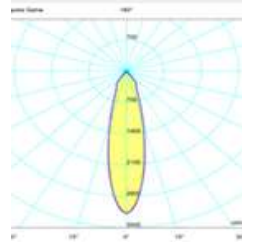

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
PLC.2022.50	50W	6500Lm	>95	>80	3000-4000-6500K	1250gr	Ø:2x175mm	H:190 W:354 D:120mm
PLC.2022.36	36W	4680Lm	>95	>80	3000-4000-6500K	870gr	Ø:2x130mm	H:147 W:294 D:120mm
PLC.2022.24	24W	3120Lm	>95	>80	3000-4000-6500K	650gr	Ø:2x105mm	H:117 W:234 D:120mm
PLC.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	540gr	Ø:2x85mm	H:97 W:194 D:120mm

RAIN




Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

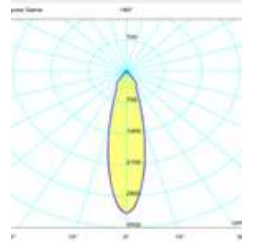

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
RIN.2022.50	50W	5000Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
RIN.2022.32	32W	4000Lm	>95	>80	3000-4000-6500K	1100gr	Ø:2x160mm	H:175 W:350 D:120mm
RIN.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x130mm	H:147 W:294 D:120mm
RIN.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x105mm	H:117 W:234 D:120mm
RIN.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

RINGO




Body :	Die cast aluminum
Diffuser :	Opal PMMA
Source of light :	Power LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

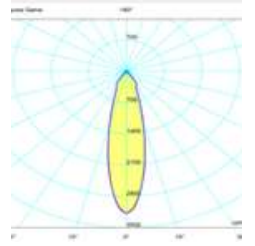

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
RNG.2022.40	40W	5000Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
RNG.2022.32	32W	4000Lm	>95	>80	3000-4000-6500K	1100gr	Ø:2x160mm	H:175 W:350 D:120mm
RNG.2022.24	24W	3500Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x130mm	H:147 W:294 D:120mm
RNG.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x105mm	H:117 W:234 D:120mm
RNG.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

RIVA




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	2700-3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

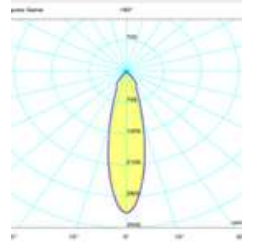

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
RVA.2022.50	50W	6500Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
RVA.2022.36	36W	4680Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x160mm	H:175 W:350 D:120mm
RVA.2022.24	24W	3120Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x130mm	H:147 W:294 D:120mm
RVA.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	595gr	Ø:2x105mm	H:117 W:234 D:120mm
RVA.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

SHARE




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

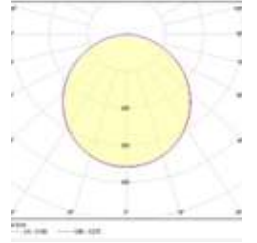

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
SHR.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	4000gr	Ø:90mm	Ø:97 D: 85mm
SHR.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	380gr	Ø:90mm	Ø:97 D: 85mm

SOHO




Body :	Die cast aluminum
Diffuser :	PMMA Opal
Source of light :	Power LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

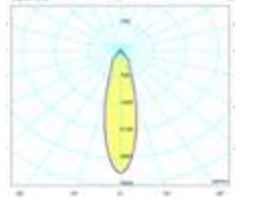

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
SHO.2022.40	40W	5000Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
SHO.2022.32	32W	4000Lm	>95	>80	3000-4000-6500K	1100gr	Ø:2x160mm	H:175 W:350 D:120mm
SHO.2022.24	24W	3500Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x130mm	H:147 W:294 D:120mm
SHO.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x105mm	H:117 W:234 D:120mm
SHO.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

ULTRA



Body :	Die cast aluminum
Diffuser :	PMMA Opal
Source of light :	Power LED
Lumen/Watt :	125Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20



Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
ULT.2022.25	25W	3000Lm	>95	>80	3000-4000-6500K	1200gr	Ø:210mm	W:227 H:227 D:85mm
ULT.2022.20	20W	2500Lm	>95	>80	3000-4000-6500K	860gr	Ø:175mm	W:192 H:192 D:85 mm
ULT.2022.16	16W	2000Lm	>95	>80	3000-4000-6500K	720gr	Ø:160mm	W:175 H:175 D:85 mm
ULT.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	580gr	Ø:130mm	W:147 H:147 D:80 mm
ULT.2022.8	8W	1000Lm	>95	>80	3000-4000-6500K	420gr	Ø:105mm	W:117 H:117 D:70 mm
ULT.2022.6	6W	750Lm	>95	>80	3000-4000-6500K	370gr	Ø:85mm	W:97 H:97 D:70 mm

URBAN




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	95+
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20



Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
URB.2022.25	25W	3250Lm	>95	>80	3000-4000-6500K	1000gr	Ø:210mm	H:227 D: 85mm
URB.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	770gr	Ø:175mm	H:192 D: 85mm
URB.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	670gr	Ø:160mm	H:175 D: 85mm
URB.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	520gr	Ø:130mm	H:147 D: 75mm
URB.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	400gr	Ø:105mm	H:117 D: 70mm
URB.2022.6	6W	780Lm	>95	>80	3000-4000-6500K	380gr	Ø:85mm	H:97 D: 70mm

VENUS




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20



Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
VNS.2022.50	50W	6500Lm	>95	>80	3000-4000-6500K	1300gr	Ø:2x175mm	H:192 W:384 D:120mm
VNS.2022.36	36W	4680Lm	>95	>80	3000-4000-6500K	910gr	Ø:2x160mm	H:175 W:350 D:120mm
VNS.2022.24	24W	3120Lm	>95	>80	3000-4000-6500K	690gr	Ø:2x130mm	H:147 W:294 D:120mm
VNS.2022.12	12W	1500Lm	>95	>80	3000-4000-6500K	505gr	Ø:2x85mm	H:97 W:194 D:120mm

WAVE




Body :	Die cast aluminum
Diffuser :	Aluminum reflector - PMMA
Source of light :	COB LED
Lumen/Watt :	130Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed ceiling mounting
Power factor :	>95
Light color :	3000-4000-6500K
IP rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



LED



IP20

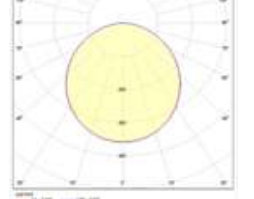

Product Code	Watt	Lumen	Power Factor	CRI	Light Color	Kg	Cut Size mm	Dimensions mm
WVE.2022.25	25W	3250Lm	>95	>80	3000-4000-6500K	1000gr	Ø:210mm	H:227 D: 85mm
WVE.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	770gr	Ø:175mm	H:192 D: 85mm
WVE.2022.18	18W	2340Lm	>95	>80	3000-4000-6500K	670gr	Ø:160mm	H:175 D: 85mm
WVE.2022.12	12W	1560Lm	>95	>80	3000-4000-6500K	520gr	Ø:130mm	H:147 D: 75mm
WVE.2022.9	9W	1170Lm	>95	>80	3000-4000-6500K	400gr	Ø:105mm	H:117 D: 70mm
WVE.2022.6	6W	780Lm	>95	>80	3000-4000-6500K	380gr	Ø:85mm	H:97 D: 70mm

Spot Light

Lighting Luminaires

CITY SQ



Body :	Aluminum
Diffuser :	Opal PMMA
Source of light :	COB
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Power factor :	L:85x85 H:110mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
CTY.83108/SQ.8	Recessed SQ	8W	800Lm	>80	2700-3000-4000K	Ø:70 H:110mm
CTY.83108/SQ.11	Recessed SQ	11W	1100Lm	>80	2700-3000-4000K	Ø:70 H:110mm

CITY SURFACE



Body :	Aluminum
Diffuser :	Opal PMMA
Source of light :	COB
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Power factor :	Ø:90 H:110mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
CTY.83108/SU.8	Surface	8W	800Lm	>80	2700-3000-4000K	Ø:90 H:110mm
CTY.83108/SU.11	Surface	11W	1100Lm	>80	2700-3000-4000K	Ø:90 H:110mm

CITY



Body :	Aluminum
Diffuser :	Opal PMMA
Source of light :	COB
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Power factor :	95+
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
CTY.83108/8	Recessed	8W	800Lm	>80	2700-3000-4000K	Ø:83 H:110mm
CTY.83108/11	Recessed	11W	1100Lm	>80	2700-3000-4000K	Ø:83 H:110mm

LENO SQ



Body :	ABS non-Flammable
Diffuser :	Opal PMMA-Micro Prismatic
Source of light :	MR16 Retrofit
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Power factor :	W:95 H:110mm
Light color :	2700K-3000K-4000K
CRI :	>80
Opsiyon :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (W:H:)
LNO.SQ.90110/8	Recessed	8W	800Lm	>80	2700-3000-4000K	W:90 H:110mm
LNO.SQ.90110/11	Recessed	11W	1100Lm	>80	2700-3000-4000K	W:90 H:110mm

LENO



Body :	ABS non-Flammable
Diffuser :	Opal PMMA-Micro Prismatic
Source of light :	MR16 Retrofit
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Power factor :	Ø:95 H:110mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

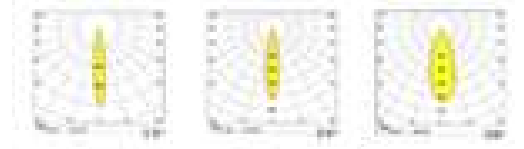


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
LNO.95108/8	Recessed	8W	800Lm	>80	2700-3000-4000K	Ø:95 H:110mm
LNO.95108/11	Recessed	11W	1100Lm	>80	2700-3000-4000K	Ø:95 H:110mm

RINA SQ



Body :	Aluminum
Diffuser :	ABS non-Flammable
Source of light :	MR16 Retrofit
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Power factor :	W:75 H:165mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

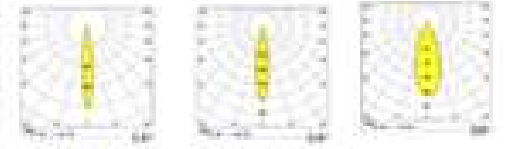


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
RNA.SQ.75165/8	Surface	8W	800Lm	>80	2700-3000-4000K	W:75 H:165mm
RNA.SQ.75165/11	Surface	11W	1100Lm	>80	2700-3000-4000K	W:75 H:165mm

RINA



Body :	Aluminum
Diffuser :	ABS non-Flammable
Source of light :	MR16 Retrofit
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Power factor :	Ø:80 H:165mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

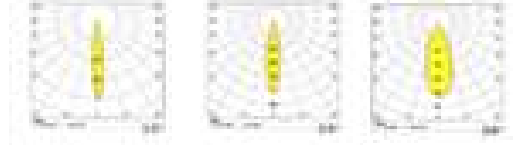

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
RNA.80165/8	Surface	8W	800Lm	>80	2700-3000-4000K	Ø:80 H:165mm
RNA.80165/11	Surface	11W	1100Lm	>80	2700-3000-4000K	Ø:80 H:165mm

SELO



Body :	Aluminum
Diffuser :	Opal PMMA
Source of light :	COB
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Power factor :	Ø:97 H:110mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
SLO.97108/8	Recessed	8W	800Lm	>80	2700-3000-4000K	Ø:90 H:110mm
SLO.97108/11	Recessed	11W	1100Lm	>80	2700-3000-4000K	Ø:90 H:110mm

SONA



Body :	Aluminum
Difüzör :	Opal PMMA
Source of light :	COB
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting:	Recessed
Power factor :	95+
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
SNA.90108/8	Recessed	8W	800Lm	>80	2700-3000-4000K	Ø:90 H:110mm
SNA.90108/11	Recessed	11W	1100Lm	>80	2700-3000-4000K	Ø:90 H:110mm

TRIM DEEP SQ



Body :	ABS non-Flammable
Diffuser :	Opal PMMA-Micro Prismatic
Source of light :	MR16 Retrofit
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Trimless
Power factor :	W:75 H:108mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

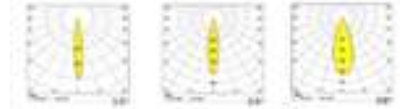


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (W:H:)
TRD.SQ.75108/8	Trimless SQ	8W	800Lm	>80	2700-3000-4000K	W:75 H:108mm
TRD.SQ.75108/11	Trimless SQ	11W	1100Lm	>80	2700-3000-4000K	W:75 H:108mm

TRIM DEEP



Body :	ABS non-Flammable
Diffuser :	Opal PMMA-Micro Prismatic
Source of light :	MR16 Retrofit
Lumen/Watt :	100Lm/W
Input voltage :	220-240V AC 50/60 Hz
Mounting :	Trimless
Power factor :	Ø:80 H:108mm
Light color :	2700K-3000K-4000K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

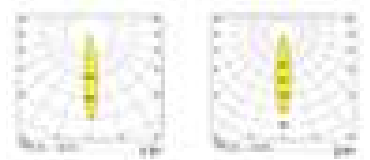

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:H:)
TRD80108/8	Trimless	8W	800Lm	>80	2700-3000-4000K	Ø:80 H:108mm
TRD80108/11	Trimless	11W	1100Lm	>80	2700-3000-4000K	Ø:80 H:108mm

Track Light
Lighting Luminaires

KENT MAGNET



Body :	Die-Cast Aluminium
Diffuser :	Opal Diffuser
Source of Light :	COB LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Monophase / 3-phase
Dimensions :	H:33 W:140 L:270mm
Light Color :	3000-4000-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

CE  LED  IP20

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
KNT.MG270/.10	Magnet Track Light	10W	1200Lm	>80	3000-4000-6500K	33x140x270mm
KNT.MG135/.5	Magnet Track Light	5W	600Lm	>80	3000-4000-6500K	33x140x135mm

KENT MAGNET




Body :	Die-Cast Aluminium
Diffuser :	Lens - Diffuser
Source of Light :	COB LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Monophase / 3-phase
Dimensions :	H:33 W:140 L:270mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20
Led lifetime :	100.000+

CE  LED  IP20

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
KNT.MG270/.10	Magnet Track Light	10W	1200Lm	>80	3000-4000-6500K	33x140x270mm
KNT.MG270/.20	Magnet Track Light	20W	2400Lm	>80	3000-4000-6500K	33x140x270mm
KNT.MG135/.5	Magnet Track Light	5W	600Lm	>80	3000-4000-6500K	33x140x135mm
KNT.MG135/.10	Magnet Track Light	10W	1200Lm	>80	3000-4000-6500K	33x140x135mm


Linear
Lighting Luminaires

DELTA WALL UP&DOWN

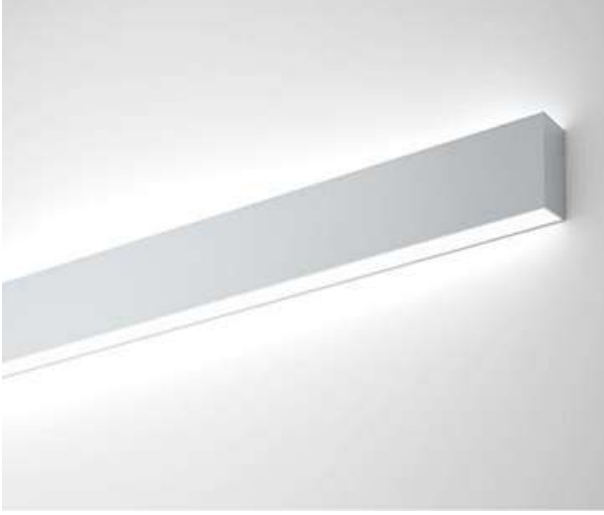


Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Wall Up&Down
Dimensions :	W:35mm H:100mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40

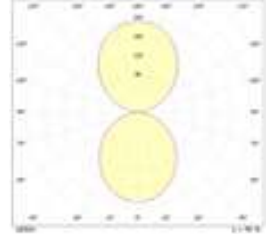


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
DLT50/35.22	Wall Up & Down	22W	2640Lm	>80	3000-4000-6500K	35x100x500mm
DLT50/35.16	Wall Up & Down	32W	3840Lm	>80	3000-4000-6500K	35x100x500mm
DLT100/35.44	Wall Up & Down	44W	5280Lm	>80	3000-4000-6500K	35x100x1000mm
DLT100/35.64	Wall Up & Down	64W	7680Lm	>80	3000-4000-6500K	35x100x1000mm
DLT120/35.54	Wall Up & Down	54W	6480Lm	>80	3000-4000-6500K	35x100x1200mm
DLT120/35.78	Wall Up & Down	78W	9360Lm	>80	3000-4000-6500K	35x100x1200mm
DLT150/35.66	Wall Up & Down	66W	7920Lm	>80	3000-4000-6500K	35x100x1500mm
DLT150/35.96	Wall Up & Down	96W	11520Lm	>80	3000-4000-6500K	35x100x1500mm
DLT200/35.84	Wall Up & Down	88W	10560Lm	>80	3000-4000-6500K	35x100x2000mm
DLT200/35.128	Wall Up & Down	128W	15360Lm	>80	3000-4000-6500K	35x100x2000mm
DLT250/35.110	Wall Up & Down	110W	13200Lm	>80	3000-4000-6500K	35x100x2500mm
DLT250/35.160	Wall Up & Down	160W	19200Lm	>80	3000-4000-6500K	35x100x2500mm
DLT300/35.132	Wall Up & Down	132W	15840Lm	>80	3000-4000-6500K	35x100x3000mm
DLT300/35.192	Wall Up & Down	192W	23040Lm	>80	3000-4000-6500K	35x100x3000mm

FAST LED BAR

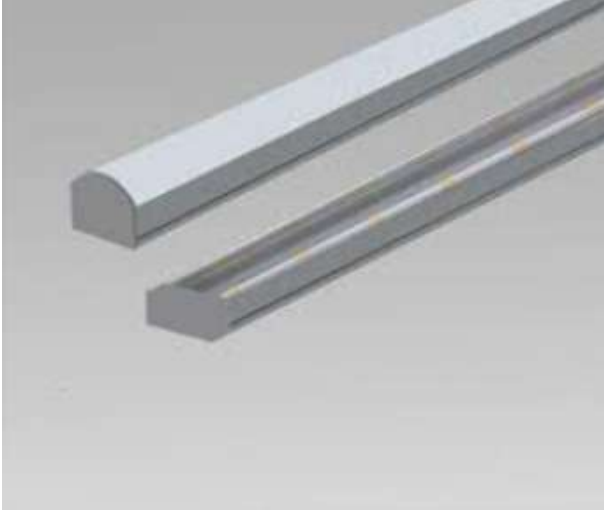

Body :	Extruded Aluminum
Diffuser :	Opal PMMA
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:18mm H:11mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40

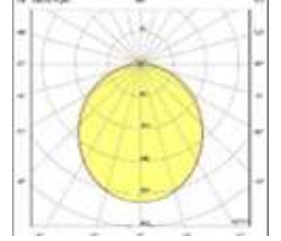


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
DLT100/18.15	Surface	15W	1800Lm	>80	3000-4000-6500K	18x11x1000mm
DLT150/18.22	Surface	22W	2640Lm	>80	3000-4000-6500K	18x11x1500mm
DLT200/18.30	Surface	30W	3600Lm	>80	3000-4000-6500K	18x11x2000mm
DLT250/18.37	Surface	37W	4440Lm	>80	3000-4000-6500K	18x11x2500mm
DLT300/18.45	Surface	45W	5400Lm	>80	3000-4000-6500K	18x11x3000mm
DLT350/18.52	Surface	52W	6240Lm	>80	3000-4000-6500K	18x11x3500mm
DLT400/18.60	Surface	60W	7200Lm	>80	3000-4000-6500K	18x11x4000mm
DLT450/18.68	Surface	68W	8160Lm	>80	3000-4000-6500K	18x11x4500mm
DLT500/18.75	Surface	75W	9000Lm	>80	3000-4000-6500K	18x11x4500mm

LAKE SURFACE



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:52mm H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40

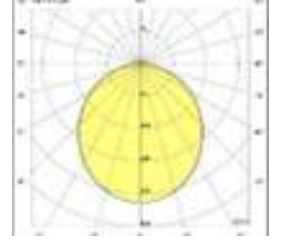


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
LKE50.S/52.11	Surface	11W	1320Lm	>80	3000-4000-6500K	52x65x500mm
LKE50.S/52.16	Surface	16W	1920Lm	>80	3000-4000-6500K	52x65x500mm
LKE100.S/52.22	Surface	22W	2640Lm	>80	3000-4000-6500K	52x65x1000mm
LKE100.S/52.32	Surface	32W	3840Lm	>80	3000-4000-6500K	52x65x1000mm
LKE120.S/52.27	Surface	27W	3240Lm	>80	3000-4000-6500K	52x65x1200mm
LKE120.S/52.19	Surface	39W	4680Lm	>80	3000-4000-6500K	52x65x1200mm
LKE150.S/52.33	Surface	33W	3960Lm	>80	3000-4000-6500K	52x65x1500mm
LKE150.S/52.48	Surface	48W	5760Lm	>80	3000-4000-6500K	52x65x1500mm
LKE200.S/52.44	Surface	44W	5280Lm	>80	3000-4000-6500K	52x65x2000mm
LKE200.S/52.64	Surface	64W	7680Lm	>80	3000-4000-6500K	52x65x2000mm
LKE250.S/52.55	Surface	55W	6600Lm	>80	3000-4000-6500K	52x65x2500mm
LKE250.S/52.80	Surface	80W	9600Lm	>80	3000-4000-6500K	52x65x2500mm
LKE300.S/52.66	Surface	66W	7920Lm	>80	3000-4000-6500K	52x65x3000mm
LKE300.S/52.96	Surface	96W	11520Lm	>80	3000-4000-6500K	52x65x3000mm

LAND SURFACE



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:33mm H:33mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

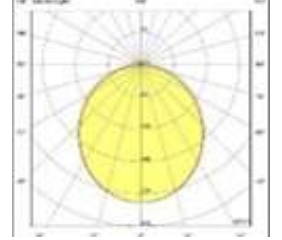


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
LND50.S/33.11	Surface	11W	1320Lm	>80	3000-4000-6500K	33x33x500mm
LND50.S/33.16	Surface	16W	1920Lm	>80	3000-4000-6500K	33x33x500mm
LND100.S/33.22	Surface	22W	2640Lm	>80	3000-4000-6500K	33x33x1000mm
LND100.S/33.32	Surface	32W	3840Lm	>80	3000-4000-6500K	33x33x1000mm
LND120.S/33.27	Surface	27W	3240Lm	>80	3000-4000-6500K	33x33x1200mm
LND120.S/33.19	Surface	39W	4680Lm	>80	3000-4000-6500K	33x33x1200mm
LND150.S/33.33	Surface	33W	3960Lm	>80	3000-4000-6500K	33x33x1500mm
LND150.S/33.48	Surface	48W	5760Lm	>80	3000-4000-6500K	33x33x1500mm
LND200.S/33.44	Surface	44W	5280Lm	>80	3000-4000-6500K	33x33x2000mm
LND200.S/33.64	Surface	64W	7680Lm	>80	3000-4000-6500K	33x33x2000mm
LND250.S/33.55	Surface	55W	6600Lm	>80	3000-4000-6500K	33x33x2500mm
LND250.S/33.80	Surface	80W	9600Lm	>80	3000-4000-6500K	33x33x2500mm
LND300.S/33.66	Surface	66W	7920Lm	>80	3000-4000-6500K	33x33x3000mm
LND300.S/33.96	Surface	96W	11520Lm	>80	3000-4000-6500K	33x33x3000mm

LAND SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Dimensions
Dimensions :	W:33mm H:33mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IIP Rating :	IP40

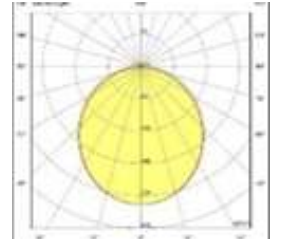


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
LND50/33.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	33x33x500mm
LND50/33.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	33x33x500mm
LND100/33.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	33x33x1000mm
LND100/33.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	33x33x1000mm
LND120/33.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	33x33x1200mm
LND120/33.19	Suspended	39W	4680Lm	>80	3000-4000-6500K	33x33x1200mm
LND150/33.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	33x33x1500mm
LND150/33.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	33x33x1500mm
LND200/33.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	33x33x2000mm
LND200/33.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	33x33x2000mm
LND250/33.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	33x33x2500mm
LND250/33.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	33x33x2500mm
LND300/33.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	33x33x3000mm
LND300/33.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	33x33x3000mm

MOON UP&DOWN



CE  LED  IP40

Body : Extruded Aluminum
Diffuser : Opal PMMA-Micro Prismatic
Source of Light : Power LED
Lumen/Watt : 120Lm/W
Input Voltage : 220-240V AC 50/60 Hz
Mounting : Suspended
Dimensions : W:87mm H:87mm
Light Color : 3000-4000-6500K
CRI : >80
Dim : DALI / 1-10V
IP Rating : IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
MON50/87.22	Suspended Up&Down	22W	2640Lm	>80	3000-4000-6500K	87x87x500mm
MON50/87.32	Suspended Up&Down	32W	3840Lm	>80	3000-4000-6500K	87x87x500mm
MON100/87.44	Suspended Up&Down	44W	5280Lm	>80	3000-4000-6500K	87x87x1000mm
MON100/87.64	Suspended Up&Down	64W	7680Lm	>80	3000-4000-6500K	87x87x1000mm
MON120/87.54	Suspended Up&Down	54W	6480Lm	>80	3000-4000-6500K	87x87x1200mm
MON120/87.78	Suspended Up&Down	78W	9360Lm	>80	3000-4000-6500K	87x87x1200mm
MON150/87.66	Suspended Up&Down	66W	7920Lm	>80	3000-4000-6500K	87x87x1500mm
MON150/87.96	Suspended Up&Down	96W	11520Lm	>80	3000-4000-6500K	87x87x1500mm
MON200/87.88	Suspended Up&Down	88W	10560Lm	>80	3000-4000-6500K	87x87x2000mm
MON200/87.128	Suspended Up&Down	128W	15360Lm	>80	3000-4000-6500K	87x87x2000mm
MON250/87.110	Suspended Up&Down	110W	13200Lm	>80	3000-4000-6500K	87x87x2500mm
MON250/87.160	Suspended Up&Down	160W	19200Lm	>80	3000-4000-6500K	87x87x2500mm
MON300/87.132	Suspended Up&Down	132W	15840Lm	>80	3000-4000-6500K	87x87x3000mm
MON300/87.192	Suspended Up&Down	192W	23040Lm	>80	3000-4000-6500K	87x87x3000mm

MUNO SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:87mm H:87mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

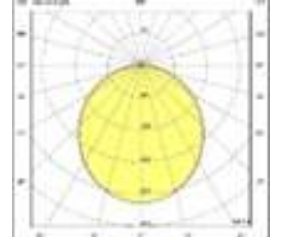


CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
MUNO60.SU/56.18	Suspended	18W	1980Lm	>80	3000-4000-6500K	70x50x570mm
MUNO120.SU/112.35	Suspended	35W	3850Lm	>80	3000-4000-6500K	70x50x1120mm
MUNO150.SU/150.50	Suspended	50W	5500Lm	>80	3000-4000-6500K	70x50x1500mm
MUNO200.SU/200.66	Suspended	66W	7250Lm	>80	3000-4000-6500K	70x50x2000mm
MUNO250.SU/250.82	Suspended	82W	9020Lm	>80	3000-4000-6500K	70x50x2500mm
MUNO300.SU/300.99	Suspended	99W	10890Lm	>80	3000-4000-6500K	70x50x3000mm

NATURAL SURFACE



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:55mm H:84mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

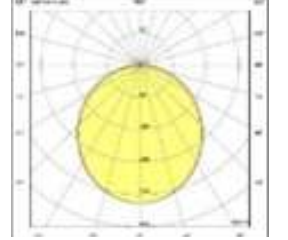


CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
NTR50.S/55.11	Surface	11W	1320Lm	>80	3000-4000-6500K	55x84x500mm
NTR50.S/55.16	Surface	16W	1920Lm	>80	3000-4000-6500K	55x84x500mm
NTR100.S/55.22	Surface	22W	2640Lm	>80	3000-4000-6500K	55x84x1000mm
NTR100.S/55.32	Surface	32W	3840Lm	>80	3000-4000-6500K	55x84x1000mm
NTR120.S/55.27	Surface	27W	3240Lm	>80	3000-4000-6500K	55x84x1200mm
NTR120.S/55.19	Surface	39W	4680Lm	>80	3000-4000-6500K	55x84x1200mm
NTR150.S/55.33	Surface	33W	3960Lm	>80	3000-4000-6500K	55x84x1500mm
NTR150.S/55.48	Surface	48W	5760Lm	>80	3000-4000-6500K	55x84x1500mm
NTR200.S/55.44	Surface	44W	5280Lm	>80	3000-4000-6500K	55x84x2000mm
NTR200.S/55.64	Surface	64W	7680Lm	>80	3000-4000-6500K	55x84x2000mm
NTR250.S/55.55	Surface	55W	6600Lm	>80	3000-4000-6500K	55x84x2500mm
NTR250.S/55.80	Surface	80W	9600Lm	>80	3000-4000-6500K	55x84x2500mm
NTR300.S/55.66	Surface	66W	7920Lm	>80	3000-4000-6500K	55x84x3000mm
NTR300.S/55.96	Surface	96W	11520Lm	>80	3000-4000-6500K	55x84x3000mm

NATURAL SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:55mm H:84mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
NTR50/55.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	55x84x500mm
NTR50/55.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	55x84x500mm
NTR100/55.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	55x84x1000mm
NTR100/55.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	55x84x1000mm
NTR120/55.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	55x84x1200mm
NTR120/55.19	Suspended	39W	4680Lm	>80	3000-4000-6500K	55x84x1200mm
NTR150/55.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	55x84x1500mm
NTR150/55.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	55x84x1500mm
NTR200/55.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	55x84x2000mm
NTR200/55.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	55x84x2000mm
NTR250/55.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	55x84x2500mm
NTR250/55.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	55x84x2500mm
NTR300/55.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	55x84x3000mm
NTR300/55.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	55x84x3000mm

OCEAN SURFACE



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:50mm H:50mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

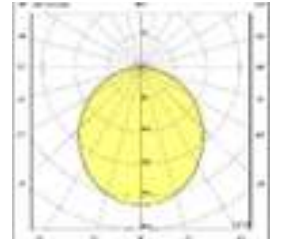


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
OCN50.S/50.11	Surface	11W	1320Lm	>80	3000-4000-6500K	50x50x500mm
OCN50.S/50.16	Surface	16W	1920Lm	>80	3000-4000-6500K	50x50x500mm
OCN100.S/50.22	Surface	22W	2640Lm	>80	3000-4000-6500K	50x50x1000mm
OCN100.S/50.32	Surface	32W	3840Lm	>80	3000-4000-6500K	50x50x1000mm
OCN120.S/50.27	Surface	27W	3240Lm	>80	3000-4000-6500K	50x50x1200mm
OCN120.S/50.19	Surface	39W	4680Lm	>80	3000-4000-6500K	50x50x1200mm
OCN150.S/50.33	Surface	33W	3960Lm	>80	3000-4000-6500K	50x50x1500mm
OCN150.S/50.48	Surface	48W	5760Lm	>80	3000-4000-6500K	50x50x1500mm
OCN200.S/50.44	Surface	44W	5280Lm	>80	3000-4000-6500K	50x50x2000mm
OCN200.S/50.64	Surface	64W	7680Lm	>80	3000-4000-6500K	50x50x2000mm
OCN250.S/50.55	Surface	55W	6600Lm	>80	3000-4000-6500K	50x50x2500mm
OCN250.S/50.80	Surface	80W	9600Lm	>80	3000-4000-6500K	50x50x2500mm
OCN300.S/50.66	Surface	66W	7920Lm	>80	3000-4000-6500K	50x50x3000mm
OCN300.S/50.96	Surface	96W	11520Lm	>80	3000-4000-6500K	50x50x3000mm

OCEAN SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:50mm H:50mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

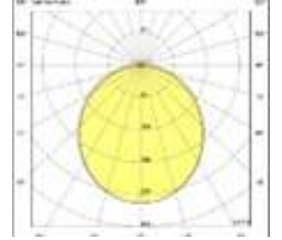

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
OCN50/50.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	50x50x500mm
OCN50/50.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	50x50x500mm
OCN100/50.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	50x50x1000mm
OCN100/50.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	50x50x1000mm
OCN120/50.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	50x50x1200mm
OCN120/50.19	Suspended	39W	4680Lm	>80	3000-4000-6500K	50x50x1200mm
OCN150/50.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	50x50x1500mm
OCN150/50.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	50x50x1500mm
OCN200/50.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	50x50x2000mm
OCN200/50.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	50x50x2000mm
OCN250/50.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	50x50x2500mm
OCN250/50.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	50x50x2500mm
OCN300/50.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	50x50x3000mm
OCN300/50.96	Sarkit Linear	96W	11520Lm	>80	3000-4000-6500K	50x50x3000mm

PURE SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	Ø:85mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
PRE50/87.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	Ø:85x500mm
PRE50/87.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	Ø:85x500mm
PRE100/87.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	Ø:85x1000mm
PRE100/87.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	Ø:85x1000mm
PRE120/87.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	Ø:85x1200mm
PRE120/87.39	Suspended	39W	4680Lm	>80	3000-4000-6500K	Ø:85x1200mm
PRE150/87.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	Ø:85x1500mm
PRE150/87.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	Ø:85x1500mm
PRE200/87.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	Ø:85x2000mm
PRE200/87.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	Ø:85x2000mm
PRE250/87.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	Ø:85x2500mm
PRE250/87.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	Ø:85x2500mm
PRE300/87.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	Ø:85x3000mm
PRE300/87.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	Ø:85x3000mm

RIVER SURFACE




Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:35mm H:60mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
RVR50.S/35.11	Surface	11W	1320Lm	>80	3000-4000-6500K	35x60x500mm
RVR50.S/35.16	Surface	16W	1920Lm	>80	3000-4000-6500K	35x60x500mm
RVR100.S/35.22	Surface	22W	2640Lm	>80	3000-4000-6500K	35x60x1000mm
RVR100.S/35.32	Surface	32W	3840Lm	>80	3000-4000-6500K	35x60x1000mm
RVR120.S/35.27	Surface	27W	3240Lm	>80	3000-4000-6500K	35x60x1200mm
RVR120.S/35.19	Surface	39W	4680Lm	>80	3000-4000-6500K	35x60x1200mm
RVR150.S/35.33	Surface	33W	3960Lm	>80	3000-4000-6500K	35x60x1500mm
RVR150.S/35.48	Surface	48W	5760Lm	>80	3000-4000-6500K	35x60x1500mm
RVR200.S/35.44	Surface	44W	5280Lm	>80	3000-4000-6500K	35x60x2000mm
RVR200.S/35.64	Surface	64W	7680Lm	>80	3000-4000-6500K	35x60x2000mm
RVR250.S/35.55	Surface	55W	6600Lm	>80	3000-4000-6500K	35x60x2500mm
RVR250.S/35.80	Surface	80W	9600Lm	>80	3000-4000-6500K	35x60x2500mm
RVR300.S/35.66	Surface	66W	7920Lm	>80	3000-4000-6500K	35x60x3000mm
RVR300.S/35.96	Surface	96W	11520Lm	>80	3000-4000-6500K	35x60x3000mm

RIVER SUSPENDED

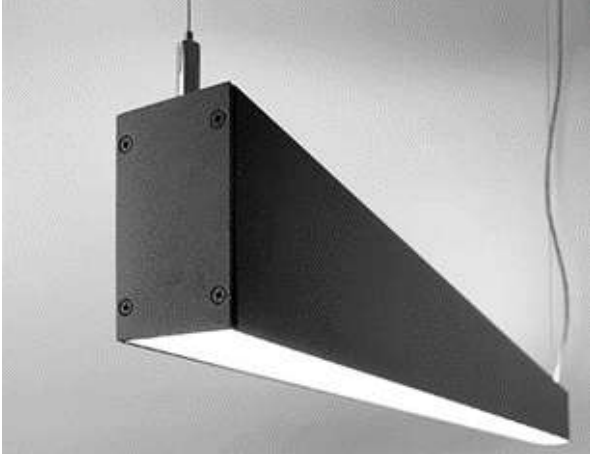

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:35mm H:60mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
RVR50/35.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	35x60x500mm
RVR50/35.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	35x60x500mm
RVR100/35.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	35x60x1000mm
RVR100/35.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	35x60x1000mm
RVR120/35.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	35x60x1200mm
RVR120/35.19	Suspended	39W	4680Lm	>80	3000-4000-6500K	35x60x1200mm
RVR150/35.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	35x60x1500mm
RVR150/35.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	35x60x1500mm
RVR200/35.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	35x60x2000mm
RVR200/35.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	35x60x2000mm
RVR250/35.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	35x60x2500mm
RVR250/35.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	35x60x2500mm
RVR300/35.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	35x60x3000mm
RVR300/35.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	35x60x3000mm

ROCK RECESSED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:98mm H:60mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
RCK50/98.11	Recessed	11W	1320Lm	>80	3000-4000-6500K	98x60x500mm
RCK50/98.16	Recessed	16W	1920Lm	>80	3000-4000-6500K	98x60x500mm
RCK100/98.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	98x60x1000mm
RCK100/98.32	Recessed	32W	3840Lm	>80	3000-4000-6500K	98x60x1000mm
RCK120/98.27	Recessed	27W	3240Lm	>80	3000-4000-6500K	98x60x1200mm
RCK120/98.39	Recessed	39W	4680Lm	>80	3000-4000-6500K	98x60x1200mm
RCK150/98.33	Recessed	33W	3960Lm	>80	3000-4000-6500K	98x60x1500mm
RCK150/98.48	Recessed	48W	5760Lm	>80	3000-4000-6500K	98x60x1500mm
RCK200/98.44	Recessed	44W	5280Lm	>80	3000-4000-6500K	98x60x2000mm
RCK200/98.64	Recessed	64W	7680Lm	>80	3000-4000-6500K	98x60x2000mm
RCK250/98.55	Recessed	55W	6600Lm	>80	3000-4000-6500K	98x60x2500mm
RCK250/98.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	98x60x2500mm
RCK300/98.66	Recessed	66W	7920Lm	>80	3000-4000-6500K	98x60x3000mm
RCK300/98.96	Recessed	96W	11520Lm	>80	3000-4000-6500K	98x60x3000mm

SOLAR RECESSED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:68mm H:37mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
SLR50/68.11	Recessed	11W	1320Lm	>80	3000-4000-6500K	68x37x500mm
SLR50/68.16	Recessed	16W	1920Lm	>80	3000-4000-6500K	68x37x500mm
SLR100/68.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	68x37x1000mm
SLR100/68.32	Recessed	32W	3840Lm	>80	3000-4000-6500K	68x37x1000mm
SLR120/68.27	Recessed	27W	3240Lm	>80	3000-4000-6500K	68x37x1200mm
SLR120/68.39	Recessed	39W	4680Lm	>80	3000-4000-6500K	68x37x1200mm
SLR150/68.33	Recessed	33W	3960Lm	>80	3000-4000-6500K	68x37x1500mm
SLR150/68.48	Recessed	48W	5760Lm	>80	3000-4000-6500K	68x37x1500mm
SLR200/68.44	Recessed	44W	5280Lm	>80	3000-4000-6500K	68x37x2000mm
SLR200/68.64	Recessed	64W	7680Lm	>80	3000-4000-6500K	68x37x2000mm
SLR250/68.55	Recessed	55W	6600Lm	>80	3000-4000-6500K	68x37x2500mm
SLR250/68.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	68x37x2500mm
SLR300/68.66	Recessed	66W	7920Lm	>80	3000-4000-6500K	68x37x3000mm
SLR300/68.96	Recessed	96W	11520Lm	>80	3000-4000-6500K	68x37x3000mm

STORM RECESSED




Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:90mm H:45mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
STM50/90.11	Recessed	11W	1320Lm	>80	3000-4000-6500K	90x45x500mm
STM50/90.16	Recessed	16W	1920Lm	>80	3000-4000-6500K	90x45x500mm
STM100/90.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	90x45x1000mm
STM100/90.32	Recessed	32W	3840Lm	>80	3000-4000-6500K	90x45x1000mm
STM120/90.27	Recessed	27W	3240Lm	>80	3000-4000-6500K	90x45x1200mm
STM120/90.39	Recessed	39W	4680Lm	>80	3000-4000-6500K	90x45x1200mm
STM150/90.33	Recessed	33W	3960Lm	>80	3000-4000-6500K	90x45x1500mm
STM150/90.48	Recessed	48W	5760Lm	>80	3000-4000-6500K	90x45x1500mm
STM200/90.44	Recessed	44W	5280Lm	>80	3000-4000-6500K	90x45x2000mm
STM200/90.64	Recessed	64W	7680Lm	>80	3000-4000-6500K	90x45x2000mm
STM250/90.55	Recessed	55W	6600Lm	>80	3000-4000-6500K	90x45x2500mm
STM250/90.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	90x45x2500mm
STM300/90.66	Recessed	66W	7920Lm	>80	3000-4000-6500K	90x45x3000mm
STM300/90.96	Recessed	96W	11520Lm	>80	3000-4000-6500K	90x45x3000mm

SUNY SURFACE

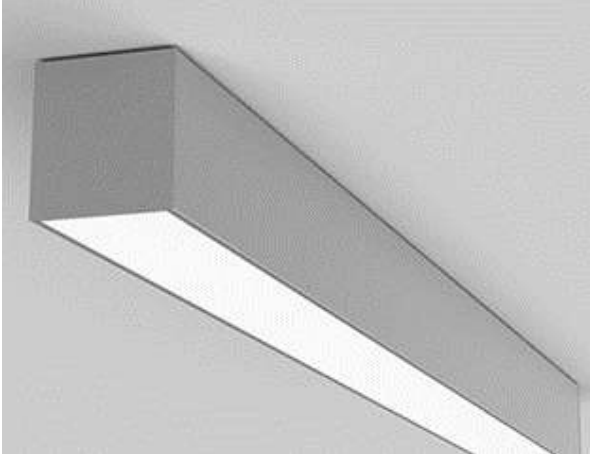

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:87mm H:87mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
SNY50.S/87.11	Surface	11W	1320Lm	>80	3000-4000-6500K	87x87x500mm
SNY50.S/87.16	Surface	16W	1920Lm	>80	3000-4000-6500K	87x87x500mm
SNY100.S/87.22	Surface	22W	2640Lm	>80	3000-4000-6500K	87x87x1000mm
SNY100.S/87.32	Surface	32W	3840Lm	>80	3000-4000-6500K	87x87x1000mm
SNY120.S/87.27	Surface	27W	3240Lm	>80	3000-4000-6500K	87x87x1200mm
SNY120.S/87.19	Surface	39W	4680Lm	>80	3000-4000-6500K	87x87x1200mm
SNY150.S/87.33	Surface	33W	3960Lm	>80	3000-4000-6500K	87x87x1500mm
SNY150.S/87.48	Surface	48W	5760Lm	>80	3000-4000-6500K	87x87x1500mm
SNY200.S/87.44	Surface	44W	5280Lm	>80	3000-4000-6500K	87x87x2000mm
SNY200.S/87.64	Surface	64W	7680Lm	>80	3000-4000-6500K	87x87x2000mm
SNY250.S/87.55	Surface	55W	6600Lm	>80	3000-4000-6500K	87x87x2500mm
SNY250.S/87.80	Surface	80W	9600Lm	>80	3000-4000-6500K	87x87x2500mm
SNY300.S/87.66	Surface	66W	7920Lm	>80	3000-4000-6500K	87x87x3000mm
SNY300.S/87.96	Surface	96W	11520Lm	>80	3000-4000-6500K	87x87x3000mm

SUNY SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:87mm H:87mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
SNY50/87.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	87x87x500mm
SNY50/87.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	87x87x500mm
SNY100/87.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	87x87x1000mm
SNY100/87.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	87x87x1000mm
SNY120/87.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	87x87x1200mm
SNY120/87.19	Suspended	39W	4680Lm	>80	3000-4000-6500K	87x87x1200mm
SNY150/87.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	87x87x1500mm
SNY150/87.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	87x87x1500mm
SNY200/87.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	87x87x2000mm
SNY200/87.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	87x87x2000mm
SNY250/87.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	87x87x2500mm
SNY250/87.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	87x87x2500mm
SNY300/87.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	87x87x3000mm
SNY300/87.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	87x87x3000mm

VISTA RECESSED




Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:73mm H:84mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
VST50/73.11	Recessed	11W	1320Lm	>80	3000-4000-6500K	73x84x500mm
VST50/73.16	Recessed	16W	1920Lm	>80	3000-4000-6500K	73x84x500mm
VST100/73.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	73x84x1000mm
VST100/73.32	Recessed	32W	3840Lm	>80	3000-4000-6500K	73x84x1000mm
VST120/73.27	Recessed	27W	3240Lm	>80	3000-4000-6500K	73x84x1200mm
VST120/73.39	Recessed	39W	4680Lm	>80	3000-4000-6500K	73x84x1200mm
VST150/73.33	Recessed	33W	3960Lm	>80	3000-4000-6500K	73x84x1500mm
VST150/73.48	Recessed	48W	5760Lm	>80	3000-4000-6500K	73x84x1500mm
VST200/73.44	Recessed	44W	5280Lm	>80	3000-4000-6500K	73x84x2000mm
VST200/73.64	Recessed	64W	7680Lm	>80	3000-4000-6500K	73x84x2000mm
VST250/73.55	Recessed	55W	6600Lm	>80	3000-4000-6500K	73x84x2500mm
VST250/73.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	73x84x2500mm
VST300/73.66	Recessed	66W	7920Lm	>80	3000-4000-6500K	73x84x3000mm
VST300/73.96	Recessed	96W	11520Lm	>80	3000-4000-6500K	73x84x3000mm

WILD SURFACE

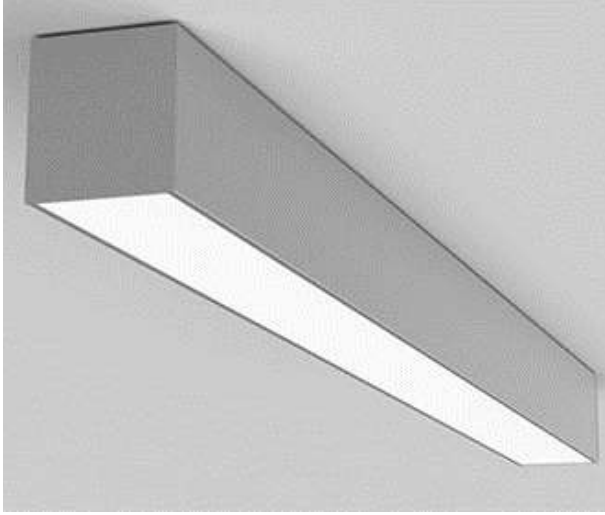

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:67mm H:84mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	P40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
WLD50.S/67.11	Surface	11W	1320Lm	>80	3000-4000-6500K	67x84x500mm
WLD50.S/67.16	Surface	16W	1920Lm	>80	3000-4000-6500K	67x84x500mm
WLD100.S/67.22	Surface	22W	2640Lm	>80	3000-4000-6500K	67x84x1000mm
WLD100.S/67.32	Surface	32W	3840Lm	>80	3000-4000-6500K	67x84x1000mm
WLD120.S/67.27	Surface	27W	3240Lm	>80	3000-4000-6500K	67x84x1200mm
WLD120.S/67.19	Surface	39W	4680Lm	>80	3000-4000-6500K	67x84x1200mm
WLD150.S/67.33	Surface	33W	3960Lm	>80	3000-4000-6500K	67x84x1500mm
WLD150.S/67.48	Surface	48W	5760Lm	>80	3000-4000-6500K	67x84x1500mm
WLD200.S/67.44	Surface	44W	5280Lm	>80	3000-4000-6500K	67x84x2000mm
WLD200.S/67.64	Surface	64W	7680Lm	>80	3000-4000-6500K	67x84x2000mm
WLD250.S/67.55	Surface	55W	6600Lm	>80	3000-4000-6500K	67x84x2500mm
WLD250.S/67.80	Surface	80W	9600Lm	>80	3000-4000-6500K	67x84x2500mm
WLD300.S/67.66	Surface	66W	7920Lm	>80	3000-4000-6500K	67x84x3000mm
WLD300.S/67.96	Surface	96W	11520Lm	>80	3000-4000-6500K	67x84x3000mm

WILD SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:67mm H:84mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
WLD50/67.11	Suspended	11W	1320Lm	>80	3000-4000-6500K	67x84x500mm
WLD50/67.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	67x84x500mm
WLD100/67.22	Suspended	22W	2640Lm	>80	3000-4000-6500K	67x84x1000mm
WLD100/67.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	67x84x1000mm
WLD120/67.27	Suspended	27W	3240Lm	>80	3000-4000-6500K	67x84x1200mm
WLD120/67.19	Suspended	39W	4680Lm	>80	3000-4000-6500K	67x84x1200mm
WLD150/67.33	Suspended	33W	3960Lm	>80	3000-4000-6500K	67x84x1500mm
WLD150/67.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	67x84x1500mm
WLD200/67.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	67x84x2000mm
WLD200/67.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	67x84x2000mm
WLD250/67.55	Suspended	55W	6600Lm	>80	3000-4000-6500K	67x84x2500mm
WLD250/67.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	67x84x2500mm
WLD300/67.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	67x84x3000mm
WLD300/67.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	67x84x3000mm

ZONE RECESSED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:46mm H:33mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ZNE50/46.11	Recessed	11W	1320Lm	>80	3000-4000-6500K	46x33x500mm
ZNE50/46.16	Recessed	16W	1920Lm	>80	3000-4000-6500K	46x33x500mm
ZNE100/46.22	Recessed	22W	2640Lm	>80	3000-4000-6500K	46x33x1000mm
ZNE100/46.32	Recessed	32W	3840Lm	>80	3000-4000-6500K	46x33x1000mm
ZNE120/46.27	Recessed	27W	3240Lm	>80	3000-4000-6500K	46x33x1200mm
ZNE120/46.39	Recessed	39W	4680Lm	>80	3000-4000-6500K	46x33x1200mm
ZNE150/46.33	Recessed	33W	3960Lm	>80	3000-4000-6500K	46x33x1500mm
ZNE150/46.48	Recessed	48W	5760Lm	>80	3000-4000-6500K	46x33x1500mm
ZNE200/46.44	Recessed	44W	5280Lm	>80	3000-4000-6500K	46x33x2000mm
ZNE200/46.64	Recessed	64W	7680Lm	>80	3000-4000-6500K	46x33x2000mm
ZNE250/46.55	Recessed	55W	6600Lm	>80	3000-4000-6500K	46x33x2500mm
ZNE250/46.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	46x33x2500mm
ZNE300/46.66	Recessed	66W	7920Lm	>80	3000-4000-6500K	46x33x3000mm
ZNE300/46.96	Recessed	96W	11520Lm	>80	3000-4000-6500K	46x33x3000mm


Decorative
Lighting Luminaires

ALPHA SURFACE



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:70mm H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:W:H:)
APH50/70.29	Surface	29W	3480Lm	>80	3000-4000-6500K	500x70x80mm
APH60/70.35	Surface	35W	4200Lm	>80	3000-4000-6500K	600x70x80mm
APH90/70.57	Surface	57W	6840Lm	>80	3000-4000-6500K	900x70x80mm
APH100/70.64	Surface	64W	7680Lm	>80	3000-4000-6500K	1000x70x80mm
APH120/70.77	Surface	77W	9240Lm	>80	3000-4000-6500K	1200x70x80mm
APH150/70.97	Surface	97W	11640Lm	>80	3000-4000-6500K	1500x70x80mm
APH180/70.119	Surface	119W	14280Lm	>80	3000-4000-6500K	1800x70x80mm
APH200/70.132	Surface	132W	15840Lm	>80	3000-4000-6500K	2000x70x80mm
APH220/70.146	Surface	146W	17520Lm	>80	3000-4000-6500K	2200x70x80mm
APH250/70.167	Surface	167W	20040Lm	>80	3000-4000-6500K	2500x70x80mm
APH280/70.188	Surface	188W	22560Lm	>80	3000-4000-6500K	2800x70x80mm
APH300/70.200	Surface	200W	24000Lm	>80	3000-4000-6500K	3000x70x80mm
APH320/70.216	Surface	216W	25920Lm	>80	3000-4000-6500K	3200x70x80mm
APH350/70.235	Surface	235W	28200Lm	>80	3000-4000-6500K	3500x70x80mm
APH380/70.258	Surface	258W	30960Lm	>80	3000-4000-6500K	3800x70x80mm
APH400/70.272	Surface	272W	32640Lm	>80	3000-4000-6500K	4000x70x80mm
APH450/70.302	Surface	302W	36240Lm	>80	3000-4000-6500K	4500x70x80mm
APH500/70.332	Surface	332W	39840Lm	>80	3000-4000-6500K	5000x70x80mm

ALPHA SUSPENDED




Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:70mm H:80mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40



LED



IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:W:H:)
APH50/70.29	Suspended	29W	3480Lm	>80	3000-4000-6500K	500x70x80mm
APH60/70.35	Suspended	35W	4200Lm	>80	3000-4000-6500K	600x70x80mm
APH90/70.57	Suspended	57W	6840Lm	>80	3000-4000-6500K	900x70x80mm
APH100/70.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	1000x70x80mm
APH120/70.77	Suspended	77W	9240Lm	>80	3000-4000-6500K	1200x70x80mm
APH150/70.97	Suspended	97W	11640Lm	>80	3000-4000-6500K	1500x70x80mm
APH180/70.119	Suspended	119W	14280Lm	>80	3000-4000-6500K	1800x70x80mm
APH200/70.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	2000x70x80mm
APH220/70.146	Suspended	146W	17520Lm	>80	3000-4000-6500K	2200x70x80mm
APH250/70.167	Suspended	167W	20040Lm	>80	3000-4000-6500K	2500x70x80mm
APH280/70.188	Suspended	188W	22560Lm	>80	3000-4000-6500K	2800x70x80mm
APH300/70.200	Suspended	200W	24000Lm	>80	3000-4000-6500K	3000x70x80mm
APH320/70.216	Suspended	216W	25920Lm	>80	3000-4000-6500K	3200x70x80mm
APH350/70.235	Suspended	235W	28200Lm	>80	3000-4000-6500K	3500x70x80mm
APH380/70.258	Suspended	258W	30960Lm	>80	3000-4000-6500K	3800x70x80mm
APH400/70.272	Suspended	272W	32640Lm	>80	3000-4000-6500K	4000x70x80mm
APH450/70.302	Suspended	302W	36240Lm	>80	3000-4000-6500K	4500x70x80mm
APH500/70.332	Suspended	332W	39840Lm	>80	3000-4000-6500K	5000x70x80mm

BOOR SURFACE



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE RoHS LED IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
BOR60.CE/100.66	Sıva Üstü Dekoratif	53W	6360Lm	>80	3000-4000-6500K	100x80x600x600mm
BOR120.CE/100.79	Sıva Üstü Dekoratif	79W	9480Lm	>80	3000-4000-6500K	100x80x600x1200mm
BOR240.CE/100.68	Sıva Üstü Dekoratif	210W	25200Lm	>80	3000-4000-6500K	100x80x1200x1200mm

BOOR SUSPENDED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
BOR60.SR/100.66	Suspended	53W	6360Lm	>80	3000-4000-6500K	100x80x600x600mm
BOR120.SR/100.79	Suspended	79W	9480Lm	>80	3000-4000-6500K	100x80x600x1200mm
BOR240.SR/100.68	Suspended	210W	25200Lm	>80	3000-4000-6500K	100x80x1200x1200mm

CUBE SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:52mm H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20


CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Işık Rengi	Dimensions mm
CBE120/52.263	Suspended	263W	31560Lm	>80	3000-4000-6500K	W:52mm H:65mm L:1200-1000-800mm

ELITE RECESSED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

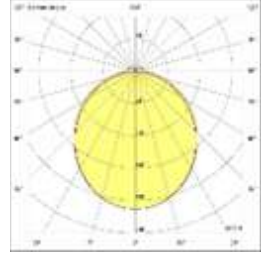


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ELT40/SA.80.40	Sıva Altı Dairesel	40W	4800Lm	>80	3000-4000-6500K	400x80mm
ELT50/SA.80.52	Sıva Altı Dairesel	52W	6240Lm	>80	3000-4000-6500K	500x80mm
ELT60/SA.80.60	Sıva Altı Dairesel	60W	7200Lm	>80	3000-4000-6500K	600x80mm
ELT90/SA.80.110	Sıva Altı Dairesel	110W	13200Lm	>80	3000-4000-6500K	900x80mm
ELT100/SA.80.120	Sıva Altı Dairesel	120W	14400Lm	>80	3000-4000-6500K	1000x80mm
ELT120/SA.80.200	Sıva Altı Dairesel	200W	24000Lm	>80	3000-4000-6500K	1200x80mm
ELT150/SA.80.360	Sıva Altı Dairesel	360W	43200Lm	>80	3000-4000-6500K	1500x80mm

ELITE SURFACE



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40

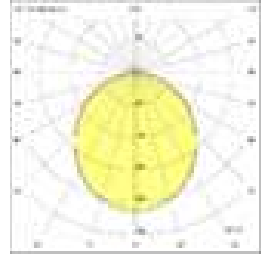


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ELT40/SU.80.40	Surface	40W	4800Lm	>80	3000-4000-6500K	400x80mm
ELT50/SU.80.52	Surface	52W	6240Lm	>80	3000-4000-6500K	500x80mm
ELT60/SU.80.60	Surface	60W	7200Lm	>80	3000-4000-6500K	600x80mm
ELT90/SU.80.110	Surface	110W	13200Lm	>80	3000-4000-6500K	900x80mm
ELT100/SU.80.120	Surface	120W	14400Lm	>80	3000-4000-6500K	1000x80mm
ELT120/SU.80.200	Surface	200W	24000Lm	>80	3000-4000-6500K	1200x80mm
ELT150/SU.80.360	Surface	360W	43200Lm	>80	3000-4000-6500K	1500x80mm

ELITE SUSPENDED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

CE  LED  IP40

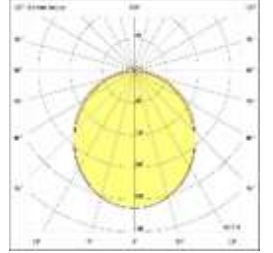


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ELT40/80.40	Suspended	40W	4800Lm	>80	3000-4000-6500K	400x80mm
ELT50/80.52	Suspended	52W	6240Lm	>80	3000-4000-6500K	500x80mm
ELT60/80.60	Suspended	60W	7200Lm	>80	3000-4000-6500K	600x80mm
ELT90/80.110	Suspended	110W	13200Lm	>80	3000-4000-6500K	900x80mm
ELT100/80.120	Suspended	120W	14400Lm	>80	3000-4000-6500K	1000x80mm
ELT120/80.200	Suspended	200W	24000Lm	>80	3000-4000-6500K	1200x80mm
ELT150/80.360	Suspended	360W	43200Lm	>80	3000-4000-6500K	1500x80mm

ELITE RECESSED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40

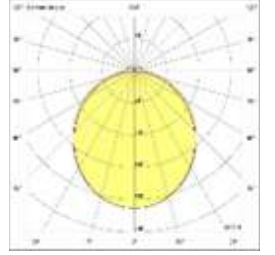

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ELT40/SA.80.40	Sıva Altı Dairesel	40W	4800Lm	>80	3000-4000-6500K	400x80mm
ELT50/SA.80.52	Sıva Altı Dairesel	52W	6240Lm	>80	3000-4000-6500K	500x80mm
ELT60/SA.80.60	Sıva Altı Dairesel	60W	7200Lm	>80	3000-4000-6500K	600x80mm
ELT90/SA.80.110	Sıva Altı Dairesel	110W	13200Lm	>80	3000-4000-6500K	900x80mm
ELT100/SA.80.120	Sıva Altı Dairesel	120W	14400Lm	>80	3000-4000-6500K	1000x80mm
ELT120/SA.80.200	Sıva Altı Dairesel	200W	24000Lm	>80	3000-4000-6500K	1200x80mm
ELT150/SA.80.360	Sıva Altı Dairesel	360W	43200Lm	>80	3000-4000-6500K	1500x80mm

HEXA SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:52 H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
HXA60/52.79	Suspended	79W	9480Lm	>80	3000-4000-6500K	52x65x600x600mm
HXA80/52.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	52x65x800x1400mm
HXA90/52.118	Suspended	118W	14160Lm	>80	3000-4000-6500K	52x65x900x900mm
HXA120/52.158	Suspended	158W	18960Lm	>80	3000-4000-6500K	52x65x1200x1200mm

JUMBO SUSPENDED




Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:70 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
JMB450.SU/70.99	Suspended	99W	11880Lm	>80	3000-4000-6500K	70x80x700x1547mm
JMB530.SU/70.170	Suspended	170W	20400Lm	>80	3000-4000-6500K	70x80x900x1749mm
JMB650.SU/70.208	Suspended	208W	25200Lm	>80	3000-4000-6500K	70x80x1200x2047mm

KAYRA SURFACE

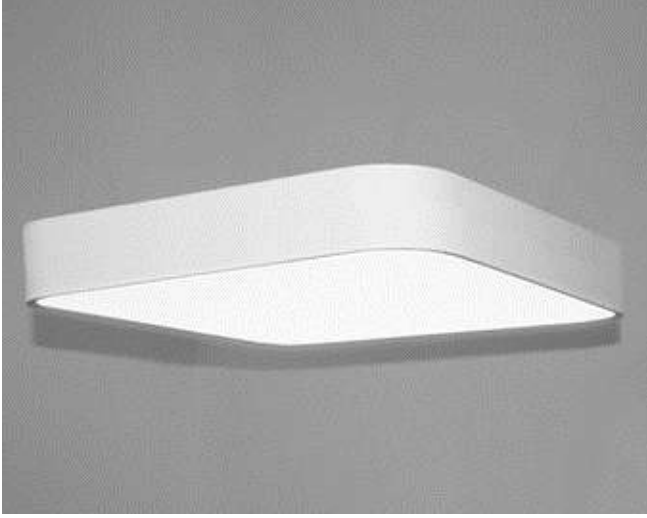

Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Işık Kaynağı :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:600 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
KYR60.CE/80.36	Sıva Üstü Dekoratif	36W	4320Lm	>80	3000-4000-6500K	600x600X80mm
KYR60.CE/80.60	Sıva Üstü Dekoratif	60W	7200Lm	>80	3000-4000-6500K	600x600X80mm

KAYRA SUSPENDED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:600 H:80mm
Renk Sıcaklığı :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
KYR60.SU/80.36	Suspended	36W	4320Lm	>80	3000-4000-6500K	600x600X80mm
KYR60.SU/80.60	Suspended	60W	7200Lm	>80	3000-4000-6500K	600x600X80mm

MATRIC SUSPENDED




Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:33mm H:33mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
MTC60/33.16	Suspended	16W	1920Lm	>80	3000-4000-6500K	33x33x600mm
MTC80/33.25	Suspended	25W	3000Lm	>80	3000-4000-6500K	33x33x800mm
MTC90/33.29	Suspended	29W	3480Lm	>80	3000-4000-6500K	33x33x900mm
MTC100/33.32	Suspended	32W	3840Lm	>80	3000-4000-6500K	33x33x1000mm
MTC120/33.38	Suspended	38W	4560Lm	>80	3000-4000-6500K	33x33x1200mm

TERA SUSPENDED

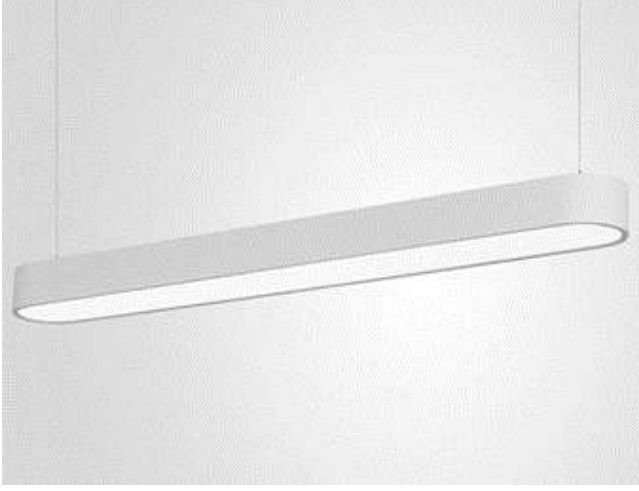

Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage:	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRA90/80.28	Suspended	28W	3360Lm	>80	3000-4000-6500K	100x80x900mm
TRA120/80.30	Suspended	30W	3600Lm	>80	3000-4000-6500K	100x80x1200mm
TRA128/80.35	Suspended	35W	4200Lm	>80	3000-4000-6500K	100x80x1280mm
TRA150/80.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TRA170/80.54	Suspended	54W	6480Lm	>80	3000-4000-6500K	100x80x1700mm

TERA SURFACE



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage:	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRA90.SU/80.28	Surface	28W	3360Lm	>80	3000-4000-6500K	100x80x900mm
TRA120.SU/80.30	Surface	30W	3600Lm	>80	3000-4000-6500K	100x80x1200mm
TRA128.SU/80.35	Surface	35W	4200Lm	>80	3000-4000-6500K	100x80x1280mm
TRA150.SU/80.48	Surface	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TRA170.SU/80.54	Surface	54W	6480Lm	>80	3000-4000-6500K	100x80x1700mm

TERA SURFACE




Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage:	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRA90.SU/80.28	Surface	28W	3360Lm	>80	3000-4000-6500K	100x80x900mm
TRA120.SU/80.30	Surface	30W	3600Lm	>80	3000-4000-6500K	100x80x1200mm
TRA128.SU/80.35	Surface	35W	4200Lm	>80	3000-4000-6500K	100x80x1280mm
TRA150.SU/80.48	Surface	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TRA170.SU/80.54	Surface	54W	6480Lm	>80	3000-4000-6500K	100x80x1700mm

TERA SUSPENDED

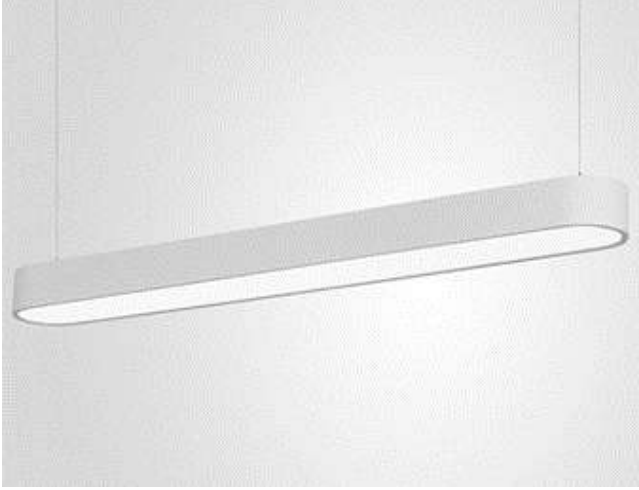

Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage:	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRA90/80.28	Suspended	28W	3360Lm	>80	3000-4000-6500K	100x80x900mm
TRA120/80.30	Suspended	30W	3600Lm	>80	3000-4000-6500K	100x80x1200mm
TRA128/80.35	Suspended	35W	4200Lm	>80	3000-4000-6500K	100x80x1280mm
TRA150/80.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TRA170/80.54	Suspended	54W	6480Lm	>80	3000-4000-6500K	100x80x1700mm

TERA SURFACE



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage:	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRA90.SU/80.28	Surface	28W	3360Lm	>80	3000-4000-6500K	100x80x900mm
TRA120.SU/80.30	Surface	30W	3600Lm	>80	3000-4000-6500K	100x80x1200mm
TRA128.SU/80.35	Surface	35W	4200Lm	>80	3000-4000-6500K	100x80x1280mm
TRA150.SU/80.48	Surface	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TRA170.SU/80.54	Surface	54W	6480Lm	>80	3000-4000-6500K	100x80x1700mm

TITAN RECESSED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage:	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TAN150.RE/100.48	Recessed	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TAN200.RE/100.64	Recessed	64W	7680Lm	>80	3000-4000-6500K	100x80x2000mm
TAN250.RE/100.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	100x80x2500mm
TAN300.RE/100.96	Recessed	96W	11520Lm	>80	3000-4000-6500K	100x80x3000mm
TAN350.RE/100.112	Recessed	112W	13440Lm	>80	3000-4000-6500K	100x80x3500mm
TAN400.RE/100.128	Recessed	128W	15360Lm	>80	3000-4000-6500K	100x80x4000mm
TAN450.RE/100.144	Recessed	144W	17280Lm	>80	3000-4000-6500K	100x80x4500mm
TAN500.RE/100.160	Recessed	160W	19200Lm	>80	3000-4000-6500K	100x80x5000mm

TITAN SURFACE



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TAN150.SU/100.48	Surface	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TAN200.SU/100.64	Surface	64W	7680Lm	>80	3000-4000-6500K	100x80x2000mm
TAN250.SU/100.80	Surface	80W	9600Lm	>80	3000-4000-6500K	100x80x2500mm
TAN300.SU/100.96	Surface	96W	11520Lm	>80	3000-4000-6500K	100x80x3000mm
TAN350.SU/100.112	Surface	112W	13440Lm	>80	3000-4000-6500K	100x80x3500mm
TAN400.SU/100.128	Surface	128W	15360Lm	>80	3000-4000-6500K	100x80x4000mm
TAN450.SU/100.144	Surface	144W	17280Lm	>80	3000-4000-6500K	100x80x4500mm
TAN500.SU/100.160	Surface	160W	19200Lm	>80	3000-4000-6500K	100x80x5000mm

TITAN SUSPENDED



Body :	Stainless Steel
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light:	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:100 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TAN150/100.48	Suspended	48W	5760Lm	>80	3000-4000-6500K	100x80x1500mm
TAN200/100.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	100x80x2000mm
TAN250/100.80	Suspended	80W	9600Lm	>80	3000-4000-6500K	100x80x2500mm
TAN300/100.96	Suspended	96W	11520Lm	>80	3000-4000-6500K	100x80x3000mm
TAN350/100.112	Suspended	112W	13440Lm	>80	3000-4000-6500K	100x80x3500mm
TAN400/100.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	100x80x4000mm
TAN450/100.144	Suspended	144W	17280Lm	>80	3000-4000-6500K	100x80x4500mm
TAN500/100.160	Suspended	160W	19200Lm	>80	3000-4000-6500K	100x80x5000mm

TRIANGLE SURFACE




Body :	Ekstrüde Alüminyum Profil
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sıva Üstü
Dimensions :	W:52 H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRG60.CE/52.58	Surface	58W	6960Lm	>80	3000-4000-6500K	52x65x600mm
TRG90.CE/52.86	Surface	86W	10320Lm	>80	3000-4000-6500K	52x65x900mm
TRG120.CE/52.115	Surface	115W	13800Lm	>80	3000-4000-6500K	52x65x1200mm
TRG150.CE/52.144	Surface	144W	17280Lm	>80	3000-4000-6500K	52x65x1500mm

TRIANGLE SUSPENDED

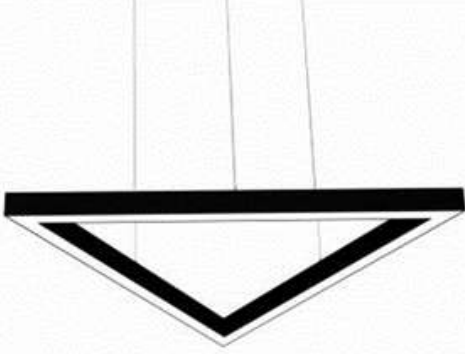


Body :	Ekstrüde Alüminyum Profil
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sarkit
Dimensions:	W:52 H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating:	IP20

CE  LED  IP40


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
TRG60.SU/52.58	Suspended	58W	6960Lm	>80	3000-4000-6500K	52x65x600mm
TRG90.SU/52.86	Suspended	86W	10320Lm	>80	3000-4000-6500K	52x65x900mm
TRG120.SU/52.115	Suspended	115W	13800Lm	>80	3000-4000-6500K	52x65x1200mm
TRG150.SU/52.144	Suspended	144W	17280Lm	>80	3000-4000-6500K	52x65x1500mm

VESTA RECESSED

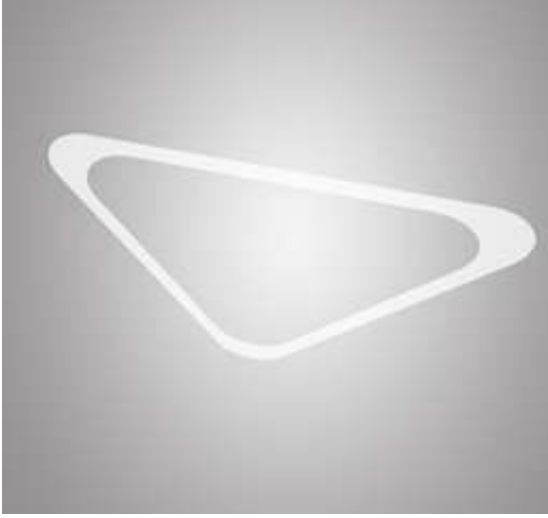


Body :	Paslanmaz Çelik
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sıva Altı
Dimensions :	W:70 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
VST60.RE/70.58	Recessed	58W	6960Lm	>80	3000-4000-6500K	70x80x600mm
VST90.RE/70.86	Recessed	86W	10320Lm	>80	3000-4000-6500K	70x80x900mm
VST120.RE/70.115	Recessed	115W	13800Lm	>80	3000-4000-6500K	70x80x1200mm
VST150.RE/70.144	Recessed	144W	17280Lm	>80	3000-4000-6500K	70x80x1500mm

VESTA SURFACE

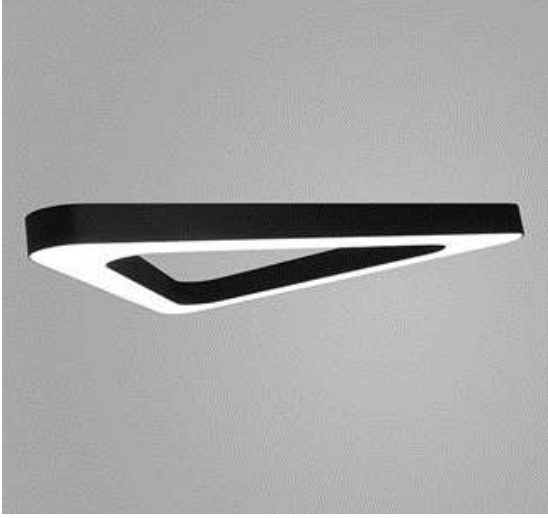

Body :	Paslanmaz Çelik
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sıva Üstü
Dimensions :	W:70 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
VST60.CE/70.58	Surface	58W	6960Lm	>80	3000-4000-6500K	70x80x600mm
VST90.CE/70.86	Surface	86W	10320Lm	>80	3000-4000-6500K	70x80x900mm
VST120.CE/70.115	Surface	115W	13800Lm	>80	3000-4000-6500K	70x80x1200mm
VST150.CE/70.144	Surface	144W	17280Lm	>80	3000-4000-6500K	70x80x1500mm

VESTA SUSPENDED




Body :	Paslanmaz Çelik
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sarkit
Dimensions :	W:70 H:80mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating:	IP20

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
VST60.SU/70.58	Suspended	58W	6960Lm	>80	3000-4000-6500K	70x80x600mm
VST90.SU/70.86	Suspended	86W	10320Lm	>80	3000-4000-6500K	70x80x900mm
VST120.SU/70.115	Suspended	115W	13800Lm	>80	3000-4000-6500K	70x80x1200mm
VST150.SU/70.144	Suspended	144W	17280Lm	>80	3000-4000-6500K	70x80x1500mm

VOLTA SURFACE

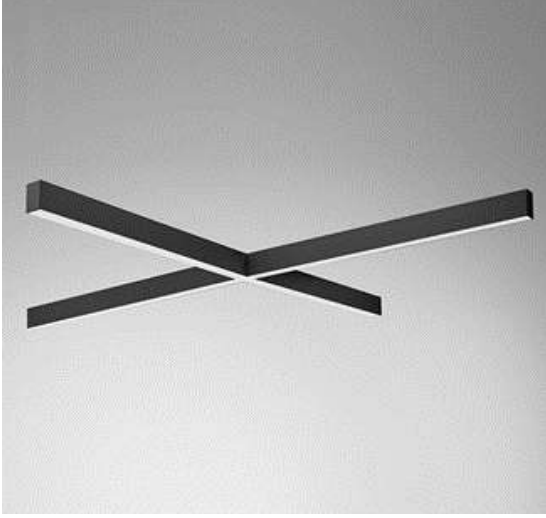


Body :	Ekstrüde Alüminyum Profil
Diffuser :	Opal PMMA-Micro Prizmatik
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Sıva Üstü
Dimensions:	W:52 H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim	DALI / 1-10V
IP R	IP20



LED



IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
VLT90.SU/52.58	Surface	58W	6960Lm	>80	3000-4000-6500K	52x65x900mm
VLT100.SU/52.64	Surface	64W	7680Lm	>80	3000-4000-6500K	52x65x1000mm
VLT120.SU/52.77	Surface	77W	9240Lm	>80	3000-4000-6500K	52x65x1200mm
VLT150.SU/52.96	Surface	96W	11520Lm	>80	3000-4000-6500K	52x65x1500mm
VLT180.SU/52.115	Surface	115W	13800Lm	>80	3000-4000-6500K	52x65x1800mm
VLT200.SU/52.128	Surface	128W	15360Lm	>80	3000-4000-6500K	52x65x2000mm

YETA SURFACE



Body :	Ekstrüde Alüminyum Profil
Diffuser :	Opal PMMA-Micro Prizmatik
Source Of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting:	Sıva Üstü
Dimensions :	W:52 H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE RoHS LED IP40




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
YTA100.CE/52.66	Surface	66W	7920Lm	>80	3000-4000-6500K	52x65X1000mm
YTA120.CE/52.79	Surface	79W	9480Lm	>80	3000-4000-6500K	52x65X1200mm
YTA150.CE/52.99	Surface	99W	11880Lm	>80	3000-4000-6500K	52x65X1500mm

YETA SUSPENDED



Body :	Ekstrüde Alüminyum Profil
Diffuser :	Opal PMMA-Micro Prizmatik
Source Of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting:	Sarkit
Dimensions :	W:52 H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP20

CE  LED  IP40



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
YTA100.SU/52.66	Suspended	66W	7920Lm	>80	3000-4000-6500K	52x65X1000mm
YTA120.SU/52.79	Suspended	79W	9480Lm	>80	3000-4000-6500K	52x65X1200mm
YTA150.SU/52.99	Suspended	99W	11880Lm	>80	3000-4000-6500K	52x65X1500mm

AURA SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light:	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:52mm H:65mm
Light Color :	3000-4000-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
ARA55.SU/52.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	52x65x550x550mm
ARA55.SU/52.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	52x65x550x550mm
ARA100.SU/52.88	Suspended	88W	10560Lm	>80	3000-4000-6500K	52x65x1000x1000mm
ARA100.SU/52.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	52x65x1000x1000mm
ARA120.SU/52.105	Suspended	105W	12600Lm	>80	3000-4000-6500K	52x65x1200x1200mm
ARA120.SU/52.154	Suspended	154W	18480Lm	>80	3000-4000-6500K	52x65x1200x1200mm
ARA150.SU/52.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	52x65x1500x1500mm
ARA150.SU/52.192	Suspended	192W	23040Lm	>80	3000-4000-6500K	52x65x1500x1500mm
ARA200.SU/52.176	Suspended	176W	21120Lm	>80	3000-4000-6500K	52x65x2000x2000mm
ARA200.SU/52.256	Suspended	256W	30720Lm	>80	3000-4000-6500K	52x65x2000x2000mm
ARA250.SU/52.220	Suspended	220W	26400Lm	>80	3000-4000-6500K	52x65x2500x2500mm
ARA250.SU/52.320	Suspended	320W	38400Lm	>80	3000-4000-6500K	52x65x2500x2500mm
ARA300.SU/52.264	Suspended	264W	31680Lm	>80	3000-4000-6500K	52x65x3000x3000mm
ARA300.SU/52.384	Suspended	384W	46080Lm	>80	3000-4000-6500K	52x65x3000x3000mm

AXEL SURFACE



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
ISource of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:33mm H:33mm
Light Color :	3000-4000-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
AXL55/33.44	Surface	44W	5280Lm	>80	3000-4000-6500K	33x33x550x550mm
AXL55/33.64	Surface	64W	7680Lm	>80	3000-4000-6500K	33x33x550x550mm
AXL100/33.88	Surface	88W	10560Lm	>80	3000-4000-6500K	33x33x1000x1000mm
AXL100/33.128	Surface	128W	15360Lm	>80	3000-4000-6500K	33x33x1000x1000mm
AXL120/33.105	Surface	105W	12600Lm	>80	3000-4000-6500K	33x33x1200x1200mm
AXL120/33.154	Surface	154W	18480Lm	>80	3000-4000-6500K	33x33x1200x1200mm
AXL150/33.132	Surface	132W	15840Lm	>80	3000-4000-6500K	33x33x1500x1500mm
AXL150/33.192	Surface	192W	23040Lm	>80	3000-4000-6500K	33x33x1500x1500mm
AXL200/33.176	Surface	176W	21120Lm	>80	3000-4000-6500K	33x33x2000x2000mm
AXL200/33.256	Surface	256W	30720Lm	>80	3000-4000-6500K	33x33x2000x2000mm
AXL250/33.220	Surface	220W	26400Lm	>80	3000-4000-6500K	33x33x2500x2500mm
AXL250/33.320	Surface	320W	38400Lm	>80	3000-4000-6500K	33x33x2500x2500mm
AXL300/33.264	Surface	264W	31680Lm	>80	3000-4000-6500K	33x33x3000x3000mm
AXL300/33.384	Surface	384W	46080Lm	>80	3000-4000-6500K	33x33x3000x3000mm

AXEL

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:33mm H:33mm
Light Color :	3000-4000-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (Ø:W:H:)
AXL55.SU/33.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	33x33x550x550mm
AXL55.SU/33.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	33x33x550x550mm
AXL100.SU/33.88	Suspended	88W	10560Lm	>80	3000-4000-6500K	33x33x1000x1000mm
AXL100.SU/33.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	33x33x1000x1000mm
AXL120.SU/33.105	Suspended	105W	12600Lm	>80	3000-4000-6500K	33x33x1200x1200mm
AXL120.SU/33.154	Suspended	154W	18480Lm	>80	3000-4000-6500K	33x33x1200x1200mm
AXL150.SU/33.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	33x33x1500x1500mm
AXL150.SU/33.192	Suspended	192W	23040Lm	>80	3000-4000-6500K	33x33x1500x1500mm
AXL200.SU/33.176	Suspended	176W	21120Lm	>80	3000-4000-6500K	33x33x2000x2000mm
AXL200.SU/33.256	Suspended	256W	30720Lm	>80	3000-4000-6500K	33x33x2000x2000mm
AXL250.SU/33.220	Suspended	220W	26400Lm	>80	3000-4000-6500K	33x33x2500x2500mm
AXL250.SU/33.320	Suspended	320W	38400Lm	>80	3000-4000-6500K	33x33x2500x2500mm
AXL300.SU/33.264	Suspended	264W	31680Lm	>80	3000-4000-6500K	33x33x3000x3000mm
AXL300.SU/33.384	Suspended	384W	46080Lm	>80	3000-4000-6500K	33x33x3000x3000mm

BRIGHT UP & DOWN SUSPENDED



CE  LED  IP40

Body : Extruded Aluminum
Diffuser : Opal PMMA-Micro Prismatic
Source of Light : Power LED
Lumen/Watt : 120Lm/W
Input Voltage : 220-240V AC 50/60 Hz
Mounting : Suspended
Dimensions : W:96mm H:106mm
Light Color : 3000K-4000K-6500K
CRI : >80
Options : DALI / 1-10V
IP Rating : IP40
Led lifetime : 100.000+

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
BRG60/96.104	Suspended Up&Down	104W	12480Lm	>80	3000-4000-6500K	96x106x600x600mm
BRG60/96.153	Suspended Up&Down	153W	18360Lm	>80	3000-4000-6500K	96x106x600x600mm
BRG90/96.158	Suspended Up&Down	158W	18960Lm	>80	3000-4000-6500K	96x106x900x900mm
BRG90/96.230	Suspended Up&Down	230W	27600Lm	>80	3000-4000-6500K	96x106x900x900mm
BRG100/96.176	Suspended Up&Down	176W	21120Lm	>80	3000-4000-6500K	96x106x1000x1000mm
BRG100/96.256	Suspended Up&Down	256W	30720Lm	>80	3000-4000-6500K	96x106x1000x1000mm
BRG120/96.211	Suspended Up&Down	211W	25320Lm	>80	3000-4000-6500K	96x106x1200x1200mm
BRG120/96.256	Suspended Up&Down	256W	30720Lm	>80	3000-4000-6500K	96x96x1200x1200mm
BRG150/96.264	Suspended Up&Down	264W	31680Lm	>80	3000-4000-6500K	96x106x1500x1500mm
BRG150/96.384	Suspended Up&Down	384W	46080Lm	>80	3000-4000-6500K	96x106x1500x1500mm
BRG200/96.352	Suspended Up&Down	352W	42240Lm	>80	3000-4000-6500K	96x106x2000x2000mm
BRG200/96.512	Suspended Up&Down	512W	61440Lm	>80	3000-4000-6500K	96x106x2000x2000mm
BRG250/96.440	Suspended Up&Down	440W	52800Lm	>80	3000-4000-6500K	96x106x2500x2500mm
BRG250/96.640	Suspended Up&Down	640W	76800Lm	>80	3000-4000-6500K	96X106x2500x2500mm
BRG300/96.528	Suspended Up&Down	528W	63360Lm	>80	3000-4000-6500K	96x106x3000x3000mm
BRG300/96.768	Suspended Up&Down	768W	92160Lm	>80	3000-4000-6500K	96x106x3000x3000mm

HABIT SUSPENDED




CE  LED  IP40

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:87mm H:87mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
HBT55.SU/87.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	87x87x550x550mm
HBT55.SU/87.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	87x87x550x550mm
HBT100.SU/87.88	Suspended	88W	10560Lm	>80	3000-4000-6500K	87x87x1000x1000mm
HBT100.SU/87.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	87x87x1000x1000mm
HBT120.SU/87.105	Suspended	105W	12600Lm	>80	3000-4000-6500K	87x87x1200x1200mm
HBT120.SU/87.154	Suspended	154W	18480Lm	>80	3000-4000-6500K	87x87x1200x1200mm
HBT150.SU/87.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	87x87x1500x1500mm
HBT150.SU/87.192	Suspended	192W	23040Lm	>80	3000-4000-6500K	87x87x1500x1500mm
HBT200.SU/87.176	Suspended	176W	21120Lm	>80	3000-4000-6500K	87x87x2000x2000mm
HBT200.SU/87.256	Suspended	256W	30720Lm	>80	3000-4000-6500K	87x87x2000x2000mm
HBT250.SU/87.220	Suspended	220W	26400Lm	>80	3000-4000-6500K	87x87x2500x2500mm
HBT250.SU/87.320	Suspended	320W	38400Lm	>80	3000-4000-6500K	87x87x2500x2500mm
HBT300.SU/87.264	Suspended	264W	31680Lm	>80	3000-4000-6500K	87x87x3000x3000mm
HBT300.SU/87.384	Suspended	384W	46080Lm	>80	3000-4000-6500K	87x87x3000x3000mm

HABIT SURFACE

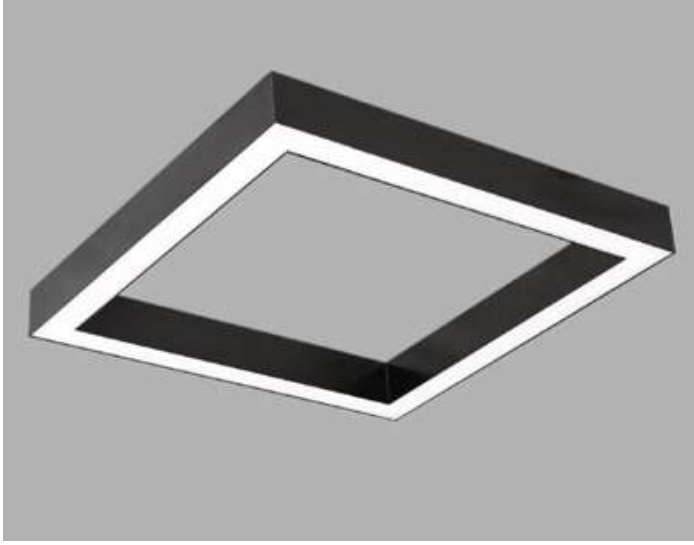


Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	595x595x H:85mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP65
Led lifetime :	100.000+

CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
HBT55/87.44	Surface	44W	5280Lm	>80	3000-4000-6500K	87x87x550x550mm
HBT55/87.64	Surface	64W	7680Lm	>80	3000-4000-6500K	87x87x550x550mm
HBT100/87.88	Surface	88W	10560Lm	>80	3000-4000-6500K	87x87x1000x1000mm
HBT100/87.128	Surface	128W	15360Lm	>80	3000-4000-6500K	87x87x1000x1000mm
HBT120/87.105	Surface	105W	12600Lm	>80	3000-4000-6500K	87x87x1200x1200mm
HBT120/87.154	Surface	154W	18480Lm	>80	3000-4000-6500K	87x87x1200x1200mm
HBT150/87.132	Surface	132W	15840Lm	>80	3000-4000-6500K	87x87x1500x1500mm
HBT150/87.192	Surface	192W	23040Lm	>80	3000-4000-6500K	87x87x1500x1500mm
HBT200/87.176	Surface	176W	21120Lm	>80	3000-4000-6500K	87x87x2000x2000mm
HBT200/87.256	Surface	256W	30720Lm	>80	3000-4000-6500K	87x87x2000x2000mm
HBT250/87.220	Surface	220W	26400Lm	>80	3000-4000-6500K	87x87x2500x2500mm
HBT250/87.320	Surface	320W	38400Lm	>80	3000-4000-6500K	87x87x2500x2500mm
HBT300/87.264	Surface	264W	31680Lm	>80	3000-4000-6500K	87x87x3000x3000mm
HBT300/87.384	Surface	384W	46080Lm	>80	3000-4000-6500K	87x87x3000x3000mm

HUGE SURFACE

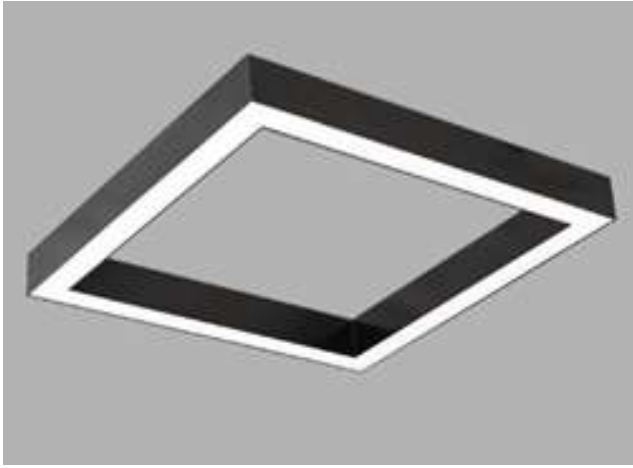

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:55mm H:84mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
HGE55/55.44	Surface	44W	5280Lm	>80	3000-4000-6500K	55x84x550x550mm
HGE55/55.64	Surface	64W	7680Lm	>80	3000-4000-6500K	55x84x550x550mm
HGE100/55.88	Surface	88W	10560Lm	>80	3000-4000-6500K	55x84x1000x1000mm
HGE100/55.128	Surface	128W	15360Lm	>80	3000-4000-6500K	55x84x1000x1000mm
HGE120/55.105	Surface	105W	12600Lm	>80	3000-4000-6500K	55x84x1200x1200mm
HGE120/55.154	Surface	154W	18480Lm	>80	3000-4000-6500K	55x84x1200x1200mm
HGE150/55.132	Surface	132W	15840Lm	>80	3000-4000-6500K	55x84x1500x1500mm
HGE150/55.192	Surface	192W	23040Lm	>80	3000-4000-6500K	55x84x1500x1500mm
HGE200/55.176	Surface	176W	21120Lm	>80	3000-4000-6500K	55x84x2000x2000mm
HGE200/55.256	Surface	256W	30720Lm	>80	3000-4000-6500K	55x84x2000x2000mm
HGE250/55.220	Surface	220W	26400Lm	>80	3000-4000-6500K	55x84x2500x2500mm
HGE250/55.320	Surface	320W	38400Lm	>80	3000-4000-6500K	55x84x2500x2500mm
HGE300/55.264	Surface	264W	31680Lm	>80	3000-4000-6500K	55x84x3000x3000mm
HGE300/55.384	Surface	384W	46080Lm	>80	3000-4000-6500K	55x84x3000x3000mm

HUGE SUSPENDED




CE  LED  IP40

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:55mm H:84mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
HGE55.SU/55.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	55x84x550x550mm
HGE55.SU/55.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	55x84x550x550mm
HGE100.SU/55.88	Suspended	88W	10560Lm	>80	3000-4000-6500K	55x84x1000x1000mm
HGE100.SU/55.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	55x84x1000x1000mm
HGE120.SU/55.105	Suspended	105W	12600Lm	>80	3000-4000-6500K	55x84x1200x1200mm
HGE120.SU/55.154	Suspended	154W	18480Lm	>80	3000-4000-6500K	55x84x1200x1200mm
HGE150.SU/55.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	55x84x1500x1500mm
HGE150.SU/55.192	Suspended	192W	23040Lm	>80	3000-4000-6500K	55x84x1500x1500mm
HGE200.SU/55.176	Suspended	176W	21120Lm	>80	3000-4000-6500K	55x84x2000x2000mm
HGE200.SU/55.256	Suspended	256W	30720Lm	>80	3000-4000-6500K	55x84x2000x2000mm
HGE250.SU/55.220	Suspended	220W	26400Lm	>80	3000-4000-6500K	55x84x2500x2500mm
HGE250.SU/55.320	Suspended	320W	38400Lm	>80	3000-4000-6500K	55x84x2500x2500mm
HGE300.SU/55.264	Suspended	264W	31680Lm	>80	3000-4000-6500K	55x84x3000x3000mm
HGE300.SU/55.384	Suspended	384W	46080Lm	>80	3000-4000-6500K	55x84x3000x3000mm

ICON SURFACE

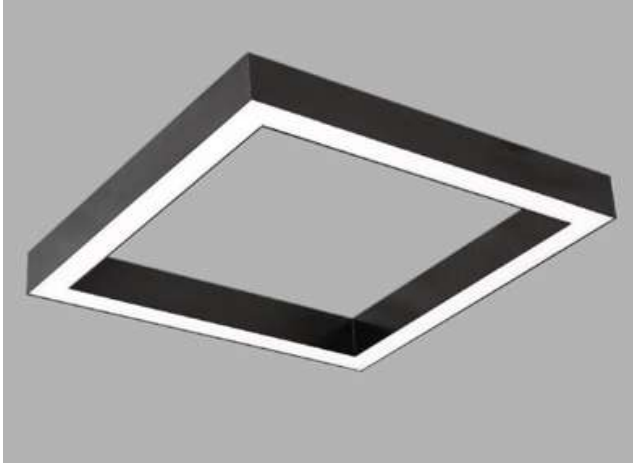

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:35mm H:60mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

CE  LED  IP40

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
ICN55/35.44	Surface	44W	5280Lm	>80	3000-4000-6500K	35x60x550x550mm
ICN55/35.64	Surface	64W	7680Lm	>80	3000-4000-6500K	35x60x550x550mm
ICN100/35.88	Surface	88W	10560Lm	>80	3000-4000-6500K	35x60x1000x1000mm
ICN100/35.128	Surface	128W	15360Lm	>80	3000-4000-6500K	35x60x1000x1000mm
ICN120/35.105	Surface	105W	12600Lm	>80	3000-4000-6500K	35x60x1200x1200mm
ICN120/35.154	Surface	154W	18480Lm	>80	3000-4000-6500K	35x60x1200x1200mm
ICN150/35.132	Surface	132W	15840Lm	>80	3000-4000-6500K	35x60x1500x1500mm
ICN150/35.192	Surface	192W	23040Lm	>80	3000-4000-6500K	35x60x1500x1500mm
ICN200/35.176	Surface	176W	21120Lm	>80	3000-4000-6500K	35x60x2000x2000mm
ICN200/35.256	Surface	256W	30720Lm	>80	3000-4000-6500K	35x60x2000x2000mm
ICN250/35.220	Surface	220W	26400Lm	>80	3000-4000-6500K	35x60x2500x2500mm
ICN250/35.320	Surface	320W	38400Lm	>80	3000-4000-6500K	35x60x2500x2500mm
ICN300/35.264	Surface	264W	31680Lm	>80	3000-4000-6500K	35x60x3000x3000mm
ICN300/35.384	Surface	384W	46080Lm	>80	3000-4000-6500K	35x60x3000x3000mm

ICON



CE  LED  IP40

Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:35mm H:60mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
ICN55.SU/35.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	35x60x550x550mm
ICN55.SU/35.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	35x60x550x550mm
ICN100.SU/35.88	Suspended	88W	10560Lm	>80	3000-4000-6500K	35x60x1000x1000mm
ICN100.SU/35.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	35x60x1000x1000mm
ICN120.SU/35.105	Suspended	105W	12600Lm	>80	3000-4000-6500K	35x60x1200x1200mm
ICN120.SU/35.154	Suspended	154W	18480Lm	>80	3000-4000-6500K	35x60x1200x1200mm
ICN150.SU/35.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	35x60x1500x1500mm
ICN150.SU/35.192	Suspended	192W	23040Lm	>80	3000-4000-6500K	35x60x1500x1500mm
ICN200.SU/35.176	Suspended	176W	21120Lm	>80	3000-4000-6500K	35x60x2000x2000mm
ICN200.SU/35.256	Suspended	256W	30720Lm	>80	3000-4000-6500K	35x60x2000x2000mm
ICN250.SU/35.220	Suspended	220W	26400Lm	>80	3000-4000-6500K	35x60x2500x2500mm
ICN250.SU/35.320	Suspended	320W	38400Lm	>80	3000-4000-6500K	35x60x2500x2500mm
ICN300.SU/35.264	Suspended	264W	31680Lm	>80	3000-4000-6500K	35x60x3000x3000mm
ICN300.SU/35.384	Suspended	384W	46080Lm	>80	3000-4000-6500K	35x60x3000x3000mm

PURE SUSPENDED



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Suspended
Dimensions :	W:67mm H:84mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP40
Led lifetime :	100.000+





Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm (L:W:H:)
PRE55.SU/67.44	Suspended	44W	5280Lm	>80	3000-4000-6500K	67x84x550x550mm
PRE55.SU/67.64	Suspended	64W	7680Lm	>80	3000-4000-6500K	67x84x550x550mm
PRE100.SU/67.88	Suspended	88W	10560Lm	>80	3000-4000-6500K	67x84x1000x1000mm
PRE100.SU/67.128	Suspended	128W	15360Lm	>80	3000-4000-6500K	67x84x1000x1000mm
PRE120.SU/67.105	Suspended	105W	12600Lm	>80	3000-4000-6500K	67x84x1200x1200mm
PRE120.SU/67.154	Suspended	154W	18480Lm	>80	3000-4000-6500K	67x84x1200x1200mm
PRE150.SU/67.132	Suspended	132W	15840Lm	>80	3000-4000-6500K	67x84x1500x1500mm
PRE150.SU/67.192	Suspended	192W	23040Lm	>80	3000-4000-6500K	67x84x1500x1500mm
PRE200.SU/67.176	Suspended	176W	21120Lm	>80	3000-4000-6500K	67x84x2000x2000mm
PRE200.SU/67.256	Suspended	256W	30720Lm	>80	3000-4000-6500K	67x84x2000x2000mm
PRE250.SU/67.220	Suspended	220W	26400Lm	>80	3000-4000-6500K	67x84x2500x2500mm
PRE250.SU/67.320	Suspended	320W	38400Lm	>80	3000-4000-6500K	67x84x2500x2500mm
PRE300.SU/67.264	Suspended	264W	31680Lm	>80	3000-4000-6500K	67x84x3000x3000mm
PRE300.SU/67.384	Suspended	384W	46080Lm	>80	3000-4000-6500K	67x84x3000x3000mm

Industrial
Lighting Luminaires

FLOW



Body :	Extruded Aluminum
Diffuser :	Opal PMMA-Micro Prismatic
Source of Light :	Power LED
Lumen/Watt :	130Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:70 H:90 L:1108 mm
Light Color :	3000-4000-6500K
IP Rating :	IP20-IP44
Options :	EMG-DALI
CRI :	>80
Led Lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
FLW.2022.150	150W	19500Lm	IK08	>85	3000-4000-6500K	4,5Kg	W:70 H:90 L:1108mm
FLW.2022.110	110W	14300Lm	IK08	>85	3000-4000-6500K	4,5Kg	W:70 H:90 L:1108mm
FLW.2022.75	75W	9750Lm	IK08	>85	3000-4000-6500K	4,5Kg	W:70 H:90 L:1108mm

MATRIX



Body :	Extruded Aluminum
Diffuser :	Tempered Glass/Aluminum Reflector
Source of Light :	Mid Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:120 H:110 mm
Light Color :	3000K-4000K-6500K
IP Rating :	IP65
Options :	EMG-DALI-Programmable
CRI :	>85
Led lifetime :	100.000+

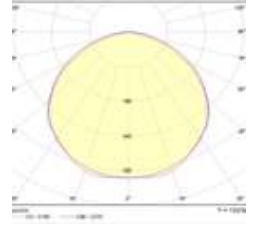


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MTX.2022.150	150W	18000Lm	IK08	>85	3000-4000-6500K	6Kg	W:120 H:110 L:1500mm
MTX.2022.110	110W	13200Lm	IK08	>85	3000-4000-6500K	5Kg	W:120 H:110 L:1200mm
MTX.2022.75	75W	9000Lm	IK08	>85	3000-4000-6500K	4Kg	W:120 H:110 L:900mm
MTX.2022.65	65W	7800Lm	IK08	>85	3000-4000-6500K	3Kg	W:120 H:110 L:600mm
MTX.2022.50	50W	6000Lm	IK08	>85	3000-4000-6500K	3Kg	W:120 H:110 L:600mm

MOTIF



Body :	Extruded Aluminum
Diffuser :	PC Opal
Source of Light :	Mid Power LED
Lumen/Watt :	130Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:52 H:72 mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>85
Led lifetime :	100.000+

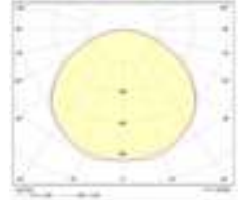


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MTF.2022.75	75W	9750Lm	IK08	>85	3000-4000-6500K	2,5Kg	W:52 H:72 L:1500mm
MTF.2022.50	50W	6500Lm	IK08	>85	3000-4000-6500K	2,5Kg	W:52 H:72 L:1500mm
MTF.2022.35	35W	4550Lm	IK08	>85	3000-4000-6500K	2Kg	W:52 H:72 L:1160mm
MTF.2022.18	18W	2340Lm	IK08	>85	3000-4000-6500K	1,5Kg	W:52 H:72 L:600mm

High-Bay Lighting Luminaires

FLEX



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:100 Ø:282mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
FLX.2022.100	100W	12000Lm	IK08	>80	3000-4000-6500K	4Kg	W:100 Ø:282mm
FLX.2022.75	75W	9000Lm	IK08	>80	3000-4000-6500K	4Kg	W:100 Ø:282mm
FLX.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	4Kg	W:100 Ø:282mm

GAP MINI



Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:67mm H:61mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP54

CE RoHS LED IP54

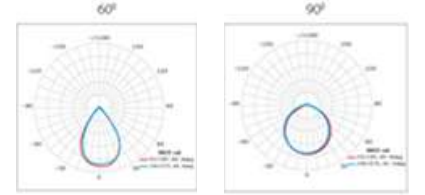

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
GAP90/67.70	Sarkıt Yüksek Tavan	70W	9450Lm	>80	3000-4000-6500K	67x61x860mm
GAP115/67.100	Sarkıt Yüksek Tavan	100W	13500Lm	>80	3000-4000-6500K	67x61x1140mm
GAP150/67.120	Sarkıt Yüksek Tavan	120W	16200Lm	>80	3000-4000-6500K	67x61x1500mm
GAP150/67.150	Sarkıt Yüksek Tavan	150W	20250Lm	>80	3000-4000-6500K	67x61x1500mm
GAP200/67.210	Sarkıt Yüksek Tavan	210W	28350Lm	>80	3000-4000-6500K	67x61x2000mm


Tri-Proof
Lighting Luminaires

INTRO



Body :	Extruded Aluminum
Diffuser :	Opal PMMA
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:29mm H:63mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP54

CE  LED  IP54




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ITO60/29.14	Surface	14W	1680Lm	>80	3000-4000-6500K	29x63x600mm
ITO60/29.20	Surface	20W	2400Lm	>80	3000-4000-6500K	29x63x600mm
ITO90/29.28	Surface	28W	3360Lm	>80	3000-4000-6500K	29x63x900mm
ITO100/29.33	Surface	33W	3960Lm	>80	3000-4000-6500K	29x63x1000mm
ITO120/29.36	Surface	36W	4320Lm	>80	3000-4000-6500K	29x63x1200mm
ITO120/29.40	Surface	40W	4800Lm	>80	3000-4000-6500K	29x63x1200mm

LOOP



Body :	PC Injection
Diffuser :	Opal PMMA
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:60mm H:70mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP65

CE  LED  IP65





Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
LOP60/60.18	Surface	18W	2160Lm	>80	3000-4000-6500K	60x70x600mm
LOP90/60.28	Surface	28W	3360Lm	>80	3000-4000-6500K	60x70x900mm
LOP100/60.33	Surface	33W	3960Lm	>80	3000-4000-6500K	60x70x1000mm
LOP120/60.36	Surface	36W	4320Lm	>80	3000-4000-6500K	60x70x1200mm
LOP120/60.45	Surface	45W	5400Lm	>80	3000-4000-6500K	60x70x1200mm
LOP150/60.60	Surface	60W	7200Lm	>80	3000-4000-6500K	60x70x1500mm

Floodlight
Lighting Luminaires

ASTRA 100



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light:	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:150 H:107 L:315mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.100/107.50	Floodlight	50W	6750Lm	>80	3000-4000-6500K	315x150x107mm
ATR.100/107.75	Floodlight	75W	10125Lm	>80	3000-4000-6500K	315x150x107mm
ATR.100/107.100	Floodlight	100W	13500Lm	>80	3000-4000-6500K	315x150x107mm

ASTRA 200



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:215 H:107 L:315mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.200/215.100	Floodlight	100W	13500Lm	>80	3000-4000-6500K	315x215x107mm
ATR.200/215.150	Floodlight	150W	20250Lm	>80	3000-4000-6500K	315x215x107mm
ATR.200/215.200	Floodlight	200W	27000Lm	>80	3000-4000-6500K	315x215x107mm

ASTRA 300




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions:	W:320 H:107 L:315mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66



LED



IP66



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.300/320.150	Floodlight	150W	20250Lm	>80	3000-4000-6500K	315x320x107mm
ATR.300/320.225	Floodlight	225W	30375Lm	>80	3000-4000-6500K	315x320x107mm
ATR.300/320.300	Floodlight	300W	40500Lm	>80	3000-4000-6500K	315x320x107mm

ASTRA 400




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:535 H:107 L:315mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+



LED



IP66



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.400/535.200	Floodlight	200W	27000Lm	>80	3000-4000-6500K	315x535x107mm
ATR.400/535.300	Floodlight	300W	40500Lm	>80	3000-4000-6500K	315x535x107mm
ATR.400/535.400	Floodlight	400W	54000Lm	>80	3000-4000-6500K	315x535x107mm

ASTRA 600




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:640 H:107 L:315mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+



LED



IP66



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.600/640.300	Floodlight	300W	40800Lm	>80	3000-4000-6500K	315x640x107mm
ATR.600/640.450	Floodlight	450W	60750Lm	>80	3000-4000-6500K	315x640x107mm
ATR.600/640.600	Floodlight	600W	81000Lm	>80	3000-4000-6500K	315x640x107mm

ASTRA 800




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:440 H:107 L:640mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+



LED



IP66



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.800/440.400	Floodlight	400W	54000Lm	>80	3000-4000-6500K	640x440x107mm
ATR.800/440.600	Floodlight	600W	81000Lm	>80	3000-4000-6500K	640x440x107mm
ATR.800/440.800	Floodlight	800W	108000Lm	>80	3000-4000-6500K	640x440x107mm

ASTRA 1000




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:550 H:107 L:640mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+



LED



IP66



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.1000/550.500	Floodlight	500W	67500Lm	>80	3000-4000-6500K	640x550x107mm
ATR.1000/550.750	Floodlight	750W	101250Lm	>80	3000-4000-6500K	640x550x107mm
ATR.1000/550.1000	Floodlight	1000W	135000Lm	>80	3000-4000-6500K	640x550x107mm

ASTRA 1200




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Power LED
Lumen/Watt :	135Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:660 H:107 L:640mm
Light Color :	3000K-4000K-6500K
CRI :	>80
Options :	DALI / 1-10V
IP Rating :	IP66
Led lifetime :	100.000+



LED



IP66




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATR.1200/660.600	Floodlight	600W	81000Lm	>80	3000-4000-6500K	640x660x107mm
ATR.1200/660.900	Floodlight	900W	121500Lm	>80	3000-4000-6500K	640x660x107mm
ATR.1200/660.1200	Floodlight	1200W	162000Lm	>80	3000-4000-6500K	640x660x107mm

LOOP PRO



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:90 H:350 L:230mm
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led Ömrü :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
LOP.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	3Kg	W:90 H:350 L:230mm
LOP.2022.40	40W	4800Lm	IK08	>80	3000-4000-6500K	3Kg	W:90 H:350 L:230mm
LOP.2022.30	30W	3600Lm	IK08	>80	3000-4000-6500K	3Kg	W:90 H:350 L:230mm

MAGIC



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:60 H:420 L:380mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

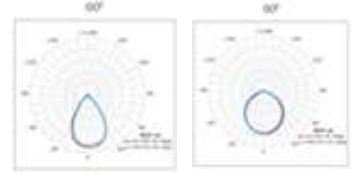


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MGC.2022.200	200W	24000Lm	IK08	>80	3000-4000-6500K	6Kg	W:60 H:420 L:380mm
MGC.2022.150	150W	18000Lm	IK08	>80	3000-4000-6500K	6Kg	W:60 H:420 L:380mm

NOVA



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:100 Ø:282mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

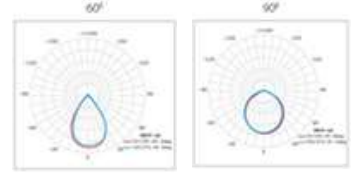


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
NVA.2022.100	100W	12000Lm	IK08	>80	3000-4000-6500K	4Kg	W:100 Ø:282mm
NVA.2022.75	75W	9000Lm	IK08	>80	3000-4000-6500K	4Kg	W:100 Ø:282mm
NVA.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	4Kg	W:100 Ø:282mm

PARADISO I



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:150 H:350 L:510mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

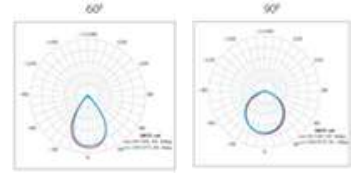


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PDS.I.2022.320	320W	38400Lm	IK08	>80	3000-4000-6500K	8Kg	W:150 H:350 L:510mm
PDS.I.2022.240	240W	28800Lm	IK08	>80	3000-4000-6500K	8Kg	W:150 H:350 L:510mm
PDS.I.2022.200	200W	24000Lm	IK08	>80	3000-4000-6500K	8Kg	W:150 H:350 L:510mm

PARADISO II



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:150 H:700 L:510mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

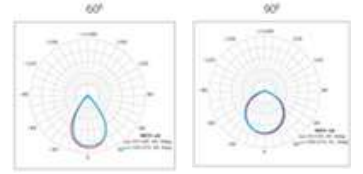


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PDS.II.2022.640	640W	76800Lm	IK08	>80	3000-4000-6500K	16Kg	W:150 H:700 L:510mm
PDS.II.2022.480	480W	57600Lm	IK08	>80	3000-4000-6500K	16Kg	W:150 H:700 L:510mm
PDS.II.2022.400	400W	48000Lm	IK08	>80	3000-4000-6500K	16Kg	W:150 H:700 L:510mm

PARADISO III



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:150 H:820 L:510mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led Ömrü :	100.000+

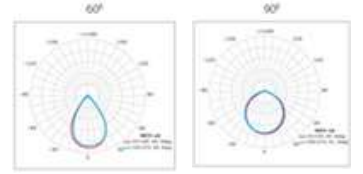


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PDS.III.2022.960	960W	115200Lm	IK08	>80	3000-4000-6500K	24Kg	W:150 H:700 L:510mm
PDS.III.2022.720	720W	86400Lm	IK08	>80	3000-4000-6500K	24Kg	W:150 H:700 L:510mm

PARADISO IV



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:150 H:1050 L:510mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

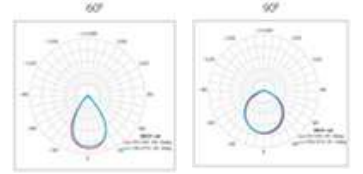


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PDS.IV.2022.1280	1280W	153600Lm	IK08	>80	3000-4000-6500K	32Kg	W:150 H:1050 L:510mm

UNIQ



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:60 H:360 L:340mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

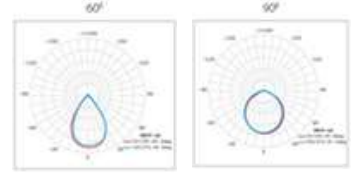


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
UNQ.2022.120	120W	14400Lm	IK08	>80	3000-4000-6500K	5Kg	W:60 H:360 L:340mm
UNQ.2022.100	100W	12000Lm	IK08	>80	3000-4000-6500K	5Kg	W:60 H:360 L:340mm
UNQ.2022.75	75W	9000Lm	IK08	>80	3000-4000-6500K	5Kg	W:60 H:360 L:340mm

Canopy
Lighting Luminaires

MERGE HIGH




Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:150 L:425x425mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options:	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MRG.2022.120/H	120W	14400Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.100/H	100W	12000Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.75/H	75W	9000Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.60/H	60W	7200Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm

MERGE SURFACE

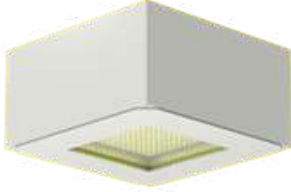

Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:125 L:425x425mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+

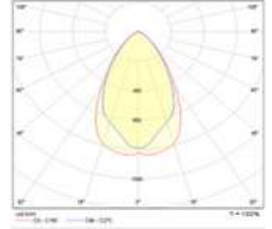


Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MRG.2022.120/SU	120W	14400Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.100/SU	100W	12000Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.75/SU	75W	9000Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.60/SU	60W	7200Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm

MERGE



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	20-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:150 L:425x425mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MRG.2022.120/H	120W	14400Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.100/H	100W	12000Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.75/H	75W	9000Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm
MRG.2022.60/H	60W	7200Lm	IK08	>80	3000-4000-6500K	6Kg	W:150 L:425x425mm

QUAD



Body :	Aluminyum Enjeksiyon
Diffuser :	Tempered Glass
Source of Light :	Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:400mm H:130mm
Light Color :	3000-4000-6500K
CRI :	>80
Dim :	DALI / 1-10V
IP Rating :	IP65
Led lifetime :	100.000+

CE  LED  IP40

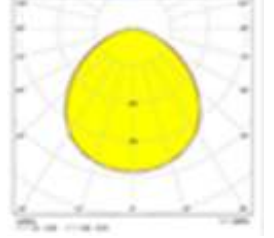

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
QUA70/40.70	Recessed	70W	8400Lm	>80	3000-4000-6500K	400x400x130mm
QUA80/40.80	Recessed	80W	9600Lm	>80	3000-4000-6500K	400x400x130mm
QUA90/40.90	Recessed	90W	10800Lm	>80	3000-4000-6500K	400x400x130mm
QUA100/40.100	Recessed	100W	12000Lm	>80	3000-4000-6500K	400x400x130mm
QUA110/40.110	Recessed	110W	13200Lm	>80	3000-4000-6500K	400x400x130mm

Ex-Proof
Lighting Luminaires

EX-PROOF ZONE II

**Zone2**

Body :	Aluminyum Enjeksiyon
Diffuser :	Borocilikat Cam
Source of Light :	36W Flouresan
Lumen/Watt :	2500Lm
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Ölçüler :	W:325 H:130 L:1300mm
Light Color :	6500K
IP Rating :	IP66
Kit :	1-3HR

Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-13/36	Acil Durum	36W	2500Lm	>80	6500K	W:325 H:130 L:1300mm

EX-PROOF 2x36 ZONE II

**Zone2**

Body:	Aluminum Injection
Diffuser :	Borolikat Glass
Source of Light :	2x36W Fluorescent
Lumen/Watt :	2500Lm
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface
Dimensions :	W:325 H:130 L:1300mm
Light Color :	6500K
IP Rating :	IP66
Kit :	1-3HR


Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-14/72	Acil Durum	2x36W	5000Lm	>80	6500K	W:325 H:130 L:1300mm

Street & Road
Lighting Luminaires

BOHO



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting:	Ø50mm Adjustable Console
Dimensions :	W:212 H:67 L:372mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	Led lifetime
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
BHO.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	3,5Kg	W:212 H:67 L:372mm
BHO.2022.40	40W	4800Lm	IK08	>80	3000-4000-6500K	3,5Kg	W:212 H:67 L:372mm

EPIC



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø60 Adjustable Console
Dimensions :	250 H:90 L:520mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
EPC.2022.150	150W	18000Lm	IK08	>80	3000-4000-6500K	4,5Kg	W:250 H:90 L:520mm
EPC.2022.120	120W	14400Lm	IK08	>80	3000-4000-6500K	4,5Kg	W:250 H:90 L:520mm

MASSIF



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø60mm Adjustable Console
Dimensions :	W:205 H:100 L:490mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	DALI-Programlanabilir
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MSF.2022.100	100W	12000Lm	IK08	>80	3000-4000-6500K	4Kg	W:205 H:100 L:490mm
MSF.2022.75	75W	9000Lm	IK08	>80	3000-4000-6500K	3,5Kg	W:205 H:100 L:490mm
MSF.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	3,5Kg	W:205 H:100 L:490mm

ROYAL



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø42mm Adjustable Console
Dimensions :	W:180 H:70 L:365mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	DALI-Programlanabilir
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
RYL.2022.50	50W	6000Lm	IK08	>80	3000-4000-6500K	3Kg	W:180 H:70 L:365mm
RYL.2022.40	40W	5200Lm	IK08	>80	3000-4000-6500K	3Kg	W:180 H:70 L:365mm

SOFT



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø60mm Adjustable Console
Dimensions :	W:337 H:70 L:793mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	NEMA-DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
SFT.2022.240	240W	28800Lm	IK08	>80	3000-4000-6500K	6,5Kg	W:337 H:70 L:793mm
SFT.2022.200	200W	24000Lm	IK08	>80	3000-4000-6500K	6,5Kg	W:337 H:70 L:793mm
SFT.2022.180	180W	21600Lm	IK08	>80	3000-4000-6500K	6,5Kg	W:337 H:70 L:793mm

SONIC



Body :	Aluminium Injection
Diffuser:	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø42mm Adjustable Console
Dimensions :	W:180 H:70 L:365mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
SNC.2022.50	50W	6000Lm	IK08	>80	3000-4000-6500K	3Kg	W:180 H:70 L:365mm
SNC.2022.40	40W	4800Lm	IK08	>80	3000-4000-6500K	3Kg	W:180 H:70 L:365mm

TARGET



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø60mm Adjustable Console
Dimensions :	W:292 H:68 L:679mm
Light Color :	3000-4000-6500K
IP Rating :	IP66
Options :	DALI-Programmable
CRI :	>80
Led lifetime :	100.000+




Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
TRG.2022.150	150W	18000Lm	IK08	>80	3000-4000-6500K	6,2Kg	W:292 H:68 L:679mm
TRG.2022.125	125W	15000Lm	IK08	>80	3000-4000-6500K	6Kg	W:292 H:68 L:679mm
TRG.2022.100	100W	12000Lm	IK08	>80	3000-4000-6500K	5,7Kg	W:292 H:68 L:679mm
TRG.2022.75	75W	9000Lm	IK08	>80	3000-4000-6500K	5,5Kg	W:292 H:68 L:679mm
TRG.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	5Kg	W:292 H:68 L:679mm

XERO



Body :	Aluminium Injection
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ø60
Dimensions :	W:279 H:76 L:609mm
Light Color:	3000-4000-6500K
IP Rating:	IP66
Options :	DALI-Programmable
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
XRO.2022.120	120W	14400Lm	IK08	>80	3000-4000-6500K	5,2Kg	W:205 H:100 L:490mm
XRO.2022.100	100W	12000Lm	IK08	>80	3000-4000-6500K	5,2Kg	W:205 H:100 L:490mm
XRO.2022.80	80W	9600Lm	IK08	>80	3000-4000-6500K	5Kg	W:205 H:100 L:490mm
XRO.2022.60	60W	7200Lm	IK08	>80	3000-4000-6500K	4,8Kg	W:205 H:100 L:490mm

Park & Garden
Lighting Luminaires

COMBO MAX



Body :	Die Cast Alüminyum
Diffuser :	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	70Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	Ø:150 H:400mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
CMB.2022.15/M	15W	1050Lm	IK08	>80	3000-4000-6500K	3Kg	Ø:150 H:1000mm

LOTUS II



Body :	Die Cast Alüminyum
Diffuser :	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	110Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:1200 H:5000mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
LTS.2022.120	2x60W	13200Lm	IK08	>80	3000-4000-6500K	20Kg	L:1200 H:5000mm

LOTUS



Body :	Die Cast Aluminyum
Diffuser :	PMMA Optical Lens
Source of Light :	Mid Power LED
Lumen/Watt :	110Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:560 H:3200mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
LTS.2022.60	60W	6600Lm	IK08	>80	3000-4000-6500K	20Kg	Ø:560 H:3200mm

MARE



Body :	Die Cast Alüminyum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:800 H:3500mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
MRE.2022.60	60W	6600Lm	IK08	>80	3000-4000-6500K	20Kg	Ø:560 H:3200mm

POINT II



Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	70Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:300 H:800mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PNT.2022.30/II	2x15W	2100Lm	IK08	>80	3000-4000-6500K	7Kg	L:300 H:800mm

POINT



Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	70Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:150 H:800mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PNT.2022.30.15	15W	1050Lm	IK08	>80	3000-4000-6500K	6Kg	L:150 H:800mm

PROS I



Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	110Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:400 H:4000mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PRS.2022.60/I	60W	6600Lm	IK08	>80	3000-4000-6500K	18Kg	L:400 H:4000mm

PROS III




Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:400 H:3500mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PRS.2022.60/III	50W	6000Lm	IK08	>80	3000-4000-6500K	20Kg	L:400 H:3500mm

PROS IV

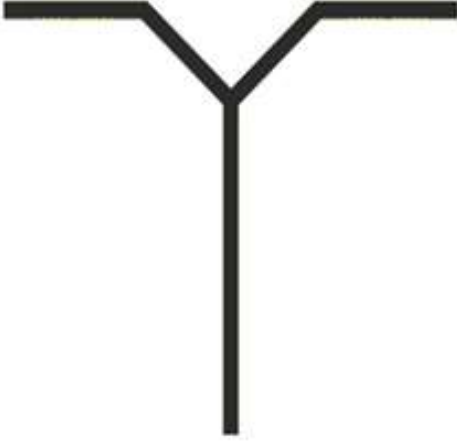

Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:800 H:3500mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PRS.2022.60/IV	2x50W	12000Lm	IK08	>80	3000-4000-6500K	25Kg	L:800 H:3500mm

PROS V



Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:400 H:3500mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PRS.2022.50/V	50W	6000Lm	IK08	>80	3000-4000-6500K	25Kg	L:800 H:3500mm

PROS VI



Body :	Extruded Aluminum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:800 H:3500mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
PRS.2022.100/VI	2x50W	12000Lm	IK08	>80	3000-4000-6500K	25Kg	L:800 H:3500mm

SATURN



Body :	Die Cast Alüminyum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	120Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:800 H:3500mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options :	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
STR.2022.60	60W	6600Lm	IK08	>80	3000-4000-6500K	20Kg	Ø:560 H:3200mm

SWAN



Body :	Die Cast Alüminyum
Diffuser :	PMMA Optical Lens
Source of Light :	High Power LED
Lumen/Watt :	140Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Ground
Dimensions :	L:1500 H:4250mm
Light Color :	3000-4000-6500K
IP Rating :	IP65
Options:	EMG-DALI
CRI :	>80
Led lifetime :	100.000+



Product Code	Watt	Lumen	IK	CRI	Light Color	Kg	Dimensions mm
SWN.2022.60	60W	8400Lm	IK08	>80	3000-4000-6500K	8Kg	L:1500 H:4250mm

Emergency
Lighting Luminaires

EMG WALL



Body :	PC Injection
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Wall
Dimensions :	W:56 H:120 L:290mm
Light Color :	6500K
IP Rating :	IP65-IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-10/8	Surface-Wall	8W	720Lm	>80	6500K	W:56 H:120 L:290mm

EMG-1



Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:50 H:170 L:320mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-1/3	Surface-Suspended	3W	270Lm	>80	6500K	W:50 H:170 L:320mm

EMG-3

Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	150Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:50 H:210 L:410mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-3/3	Surface-Suspended	3W	450Lm	>80	6500K	W:50 H:210 L:410mm

EMG-3



Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	150Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:50 H:210 L:410mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-3/3	Surface-Suspended	3W	450Lm	>80	6500K	W:50 H:210 L:410mm

EMG-4

Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Recessed
Dimensions :	W:60 H:160 L:320mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-4/3	Recessed	3W	270Lm	>80	6500K	W:60 H:160 L:320mm

EMG-5



Body :	PC Injection
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:50 H:200 L:304mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-5/3	Surface-Suspended	3W	270Lm	>80	6500K	W:50 H:200 L:304mm

EMG-6



Body :	Aluminum Extrusion
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:50 H:200 L:304mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-6/3	Surface-Suspended	3W	270Lm	>80	6500K	W:50 H:200 L:304mm

EMG-7



Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Suspended
Dimensions :	W:50 H:200 L:304mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-7/3	Surface-Suspended	3W	270Lm	>80	6500K	W:50 H:200 L:304mm

EMG-8

Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Wall
Dimensions :	W:90 H:170 L:330mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-8/3	Surface-Wall	3W	270Lm	>80	6500K	W:90 H:170 L:330mm

EMG-9



Body :	DKP Sheet
Diffuser :	Opal Acrylic
Source of Light :	Power LED
Lümen/Watt :	90Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Surface-Wall
Dimensions :	W:70 H:170 L:330mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-9/3	Surface-Wall	3W	270Lm	>80	6500K	W:70 H:170 L:330mm

HALOJEN 2X ACİL DURUM



Body :	DKP Sheet
Diffuser :	Opal PMMA
Source of Light :	Halogen Bulb
Lümen/Watt :	1180Lm
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Wall
Dimensions :	W:90 H:200 L:415mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR



Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-12/100	Emergency	2xQT12 50W	2360Lm	>80	6500K	W:90 H:200 L:415mm

ZOOM



Body :	DKP Sheet
Diffuser :	Opal PMMA
Source of Light :	Power LED
Lümen/Watt :	80Lm/W
Input Voltage :	220-240V AC 50/60 Hz
Mounting :	Wall
Dimensions :	W:90 H:150 L:345mm
Light Color :	6500K
IP Rating :	IP40
Kit :	1-3HR




Product Code	Product	Watt	Lumen	CRI	Light Color	Dimensions mm
ATL.2022.EMG-11/16	Emergency	2x8W	1300Lm	>80	6500K	W:90 H:150 L:345mm

Project Images



Project Images

www.atlaslighting.com.tr

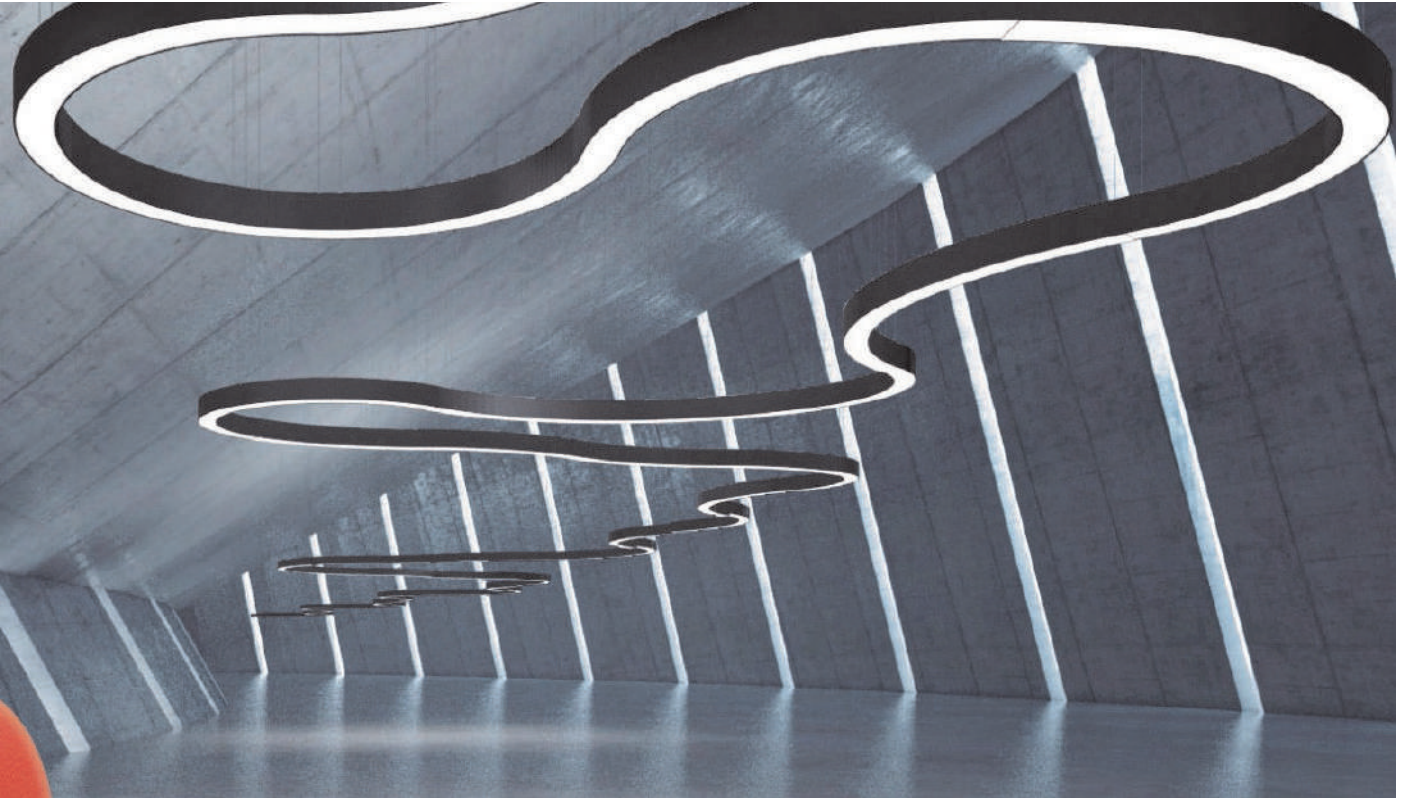



Project Images

www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr



Project Images



www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr

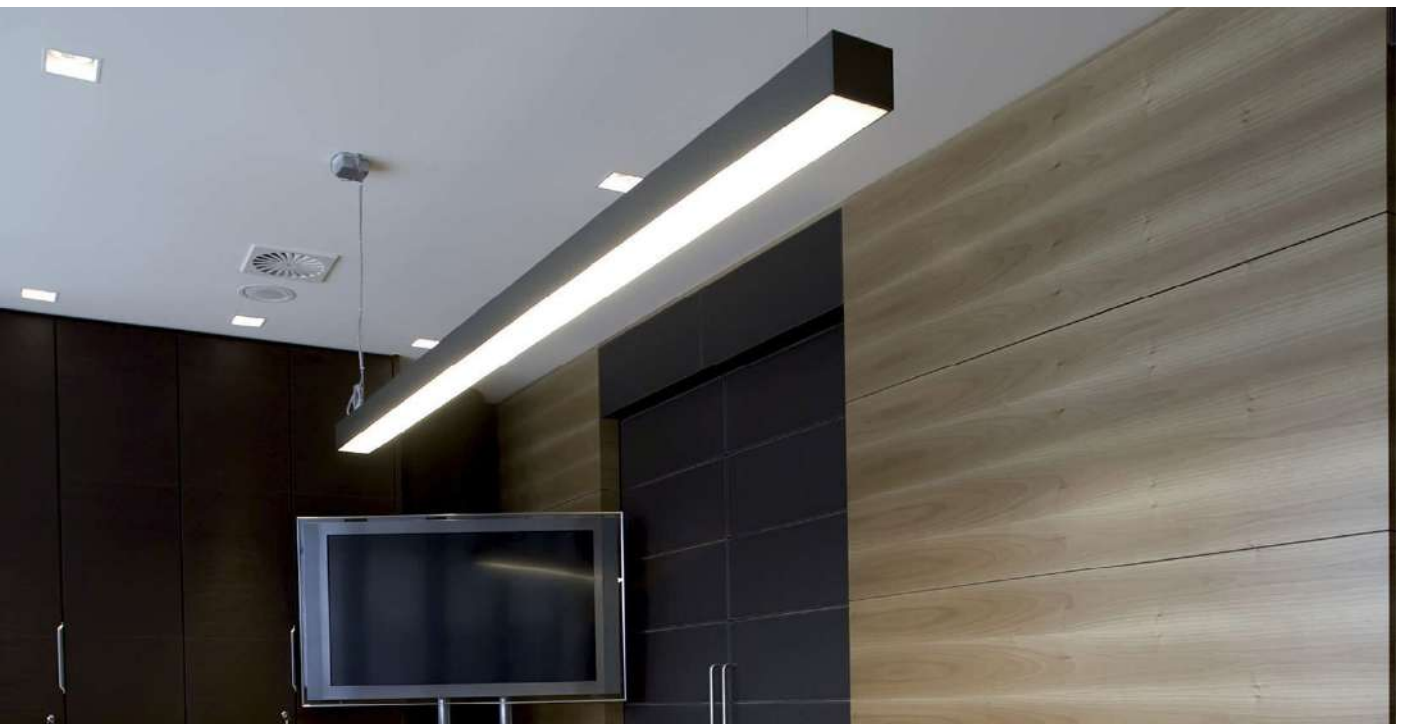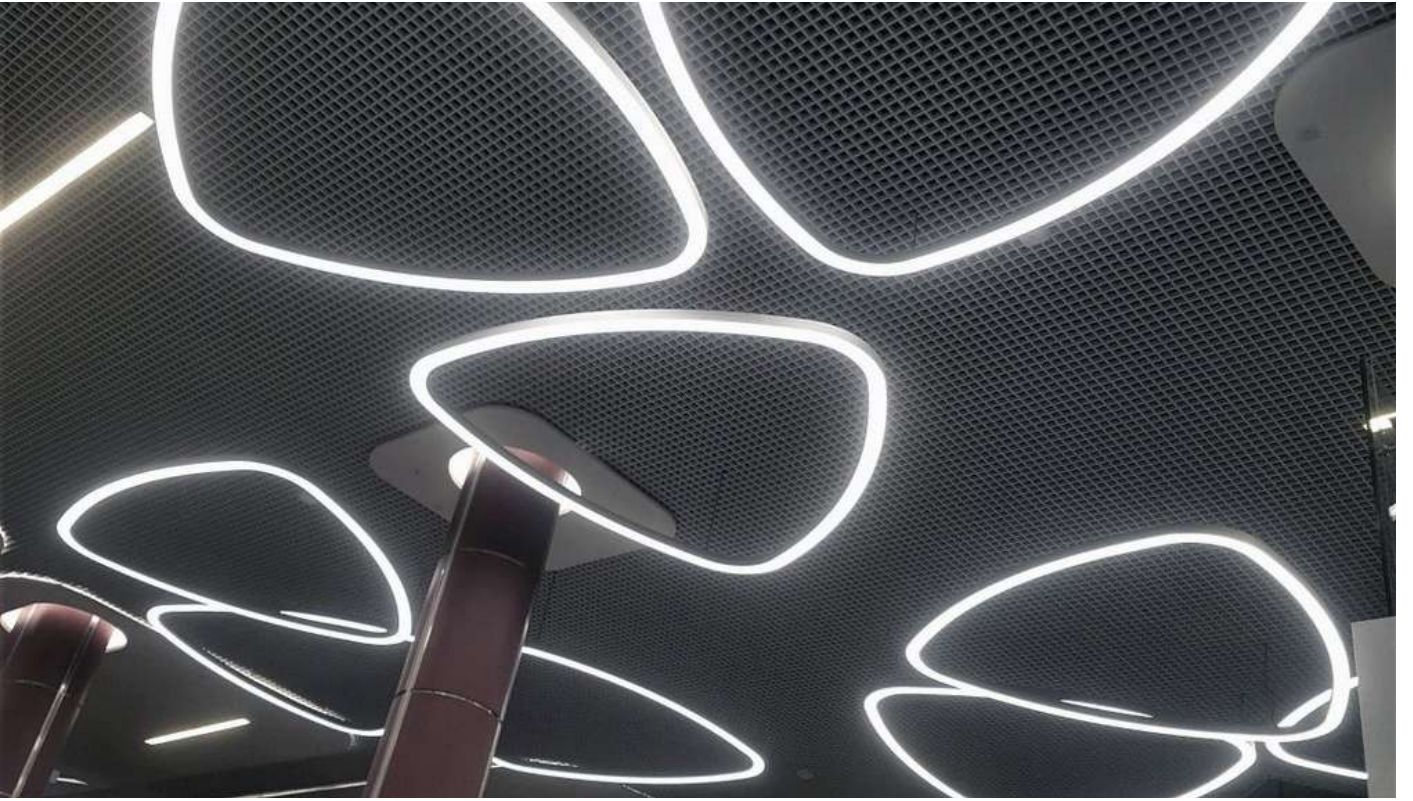



Project Images

www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr





Project Images


www.atlaslighting.com.tr





Project Images

www.atlaslighting.com.tr

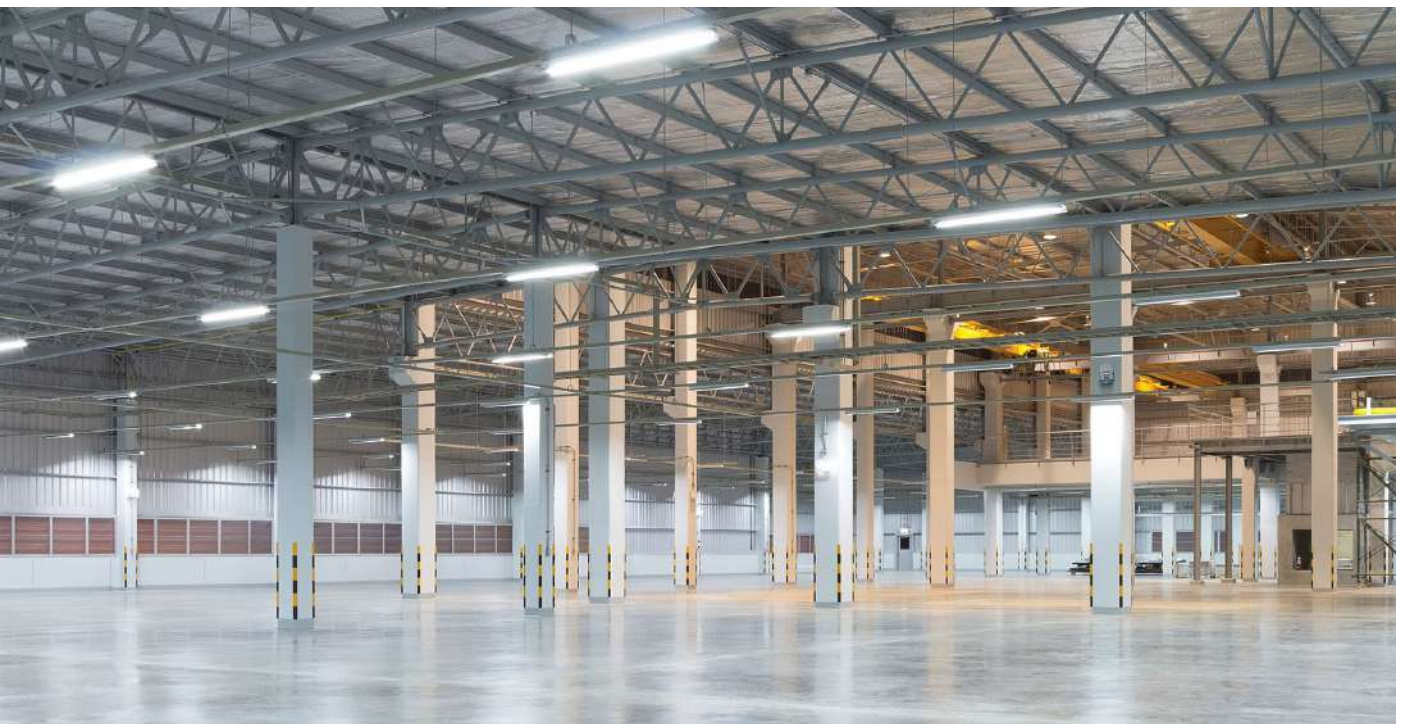



Project Images


www.atlaslighting.com.tr






Project Images

www.atlaslighting.com.tr

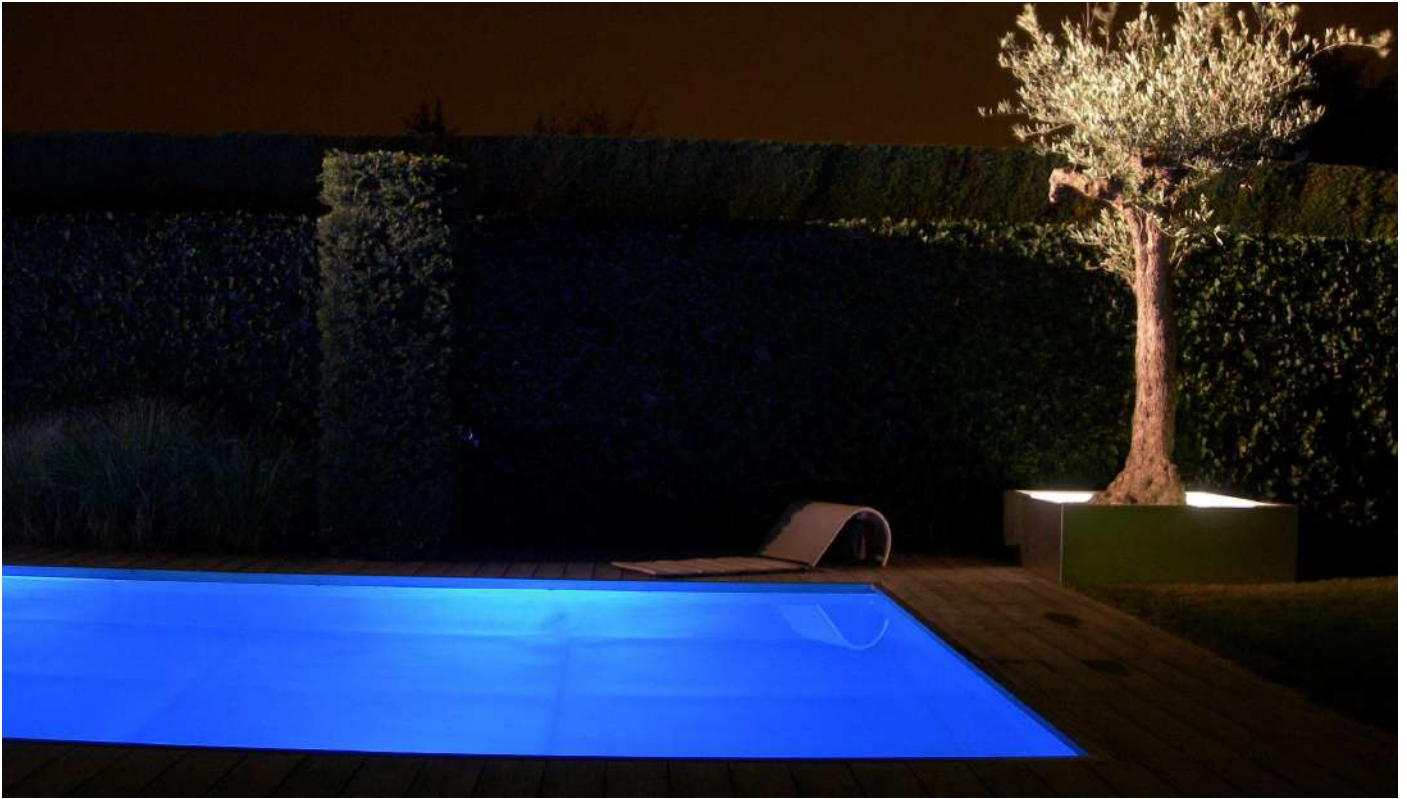

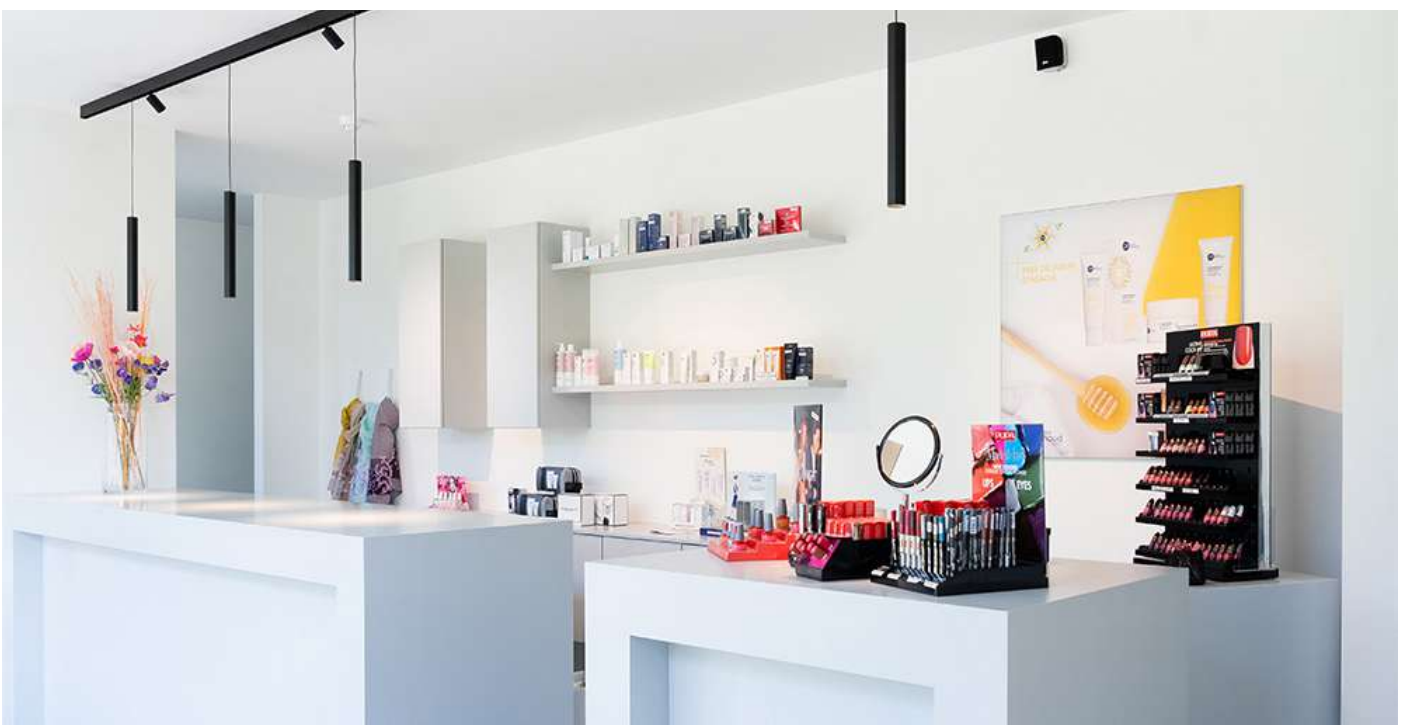

Project Images

www.atlaslighting.com.tr



ATLAS LIGHTING

ATLASLIGHT AYDINLATMA SANAYİ VE DIŞ TİCARET LTD.ŞTİ.

Yıldırım Mah. Kınalıada Sok. No:19 D.4 34045 Bayrampaşa-İstanbul
+90 541 280 97 34 | info@atlaslighting.com.tr | export@atlaslighting.com.tr

www.atlaslighting.com.tr